




OPTIONAL CMA E-TEMP™

Hot Water Assurance System
For Conveyor-Style Dishwashers

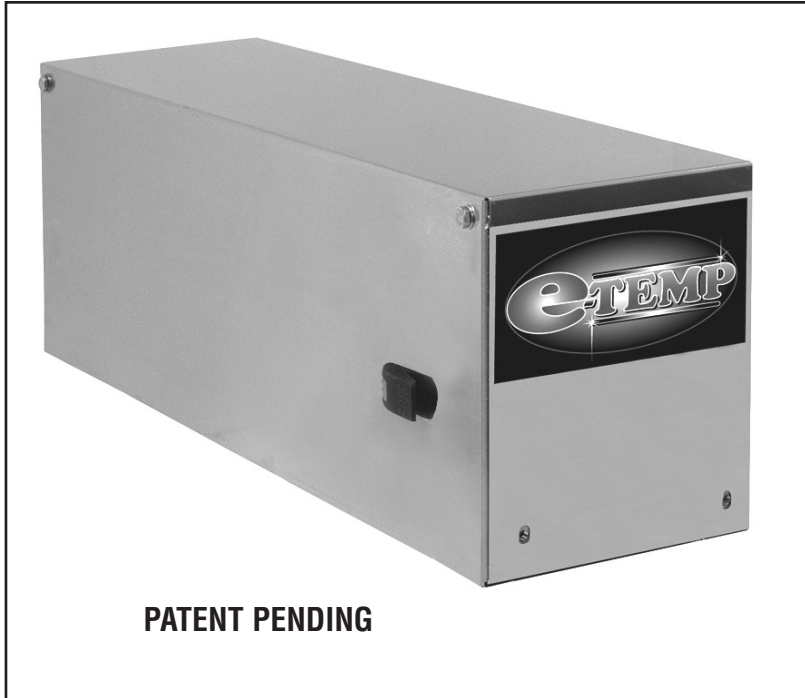

PATENT PENDING



**MODEL EST-44 WITH E-TEMP™ BOOSTER HEATER
ALSO AVAILABLE ON MODEL EST-66**

FEATURES:

- 208V / 240V, 480V, single and three phase configurations
- Single element (40-degree) vs. dual element option (70-degree)
- Tank plug for single element option
- Separate 208V/ 240V 3-phase power connection required (electrical connection point provided inside conveyor control panel)
- Pre-plumbed, wired, and secured to the dishmachine
- Non-pressurized system for safe operation
- 40-degree rise
 - 9kW @ 208V, 25 amps
 - 12kW @ 240V, 29 amps
 - 12kW @ 480V, 15 amps
- 70-degree rise
 - 15kW @ 208V, 42 amps
 - 20kW @ 240V, 48 amps
 - 18kW @ 480V, 22 amps
- Field convertible from 40-degree rise to 70-degree rise






OPTIONAL CMA E-TEMP

Hot Water Assurance System
For Conveyor Style Dishwashers

WARNING: Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.

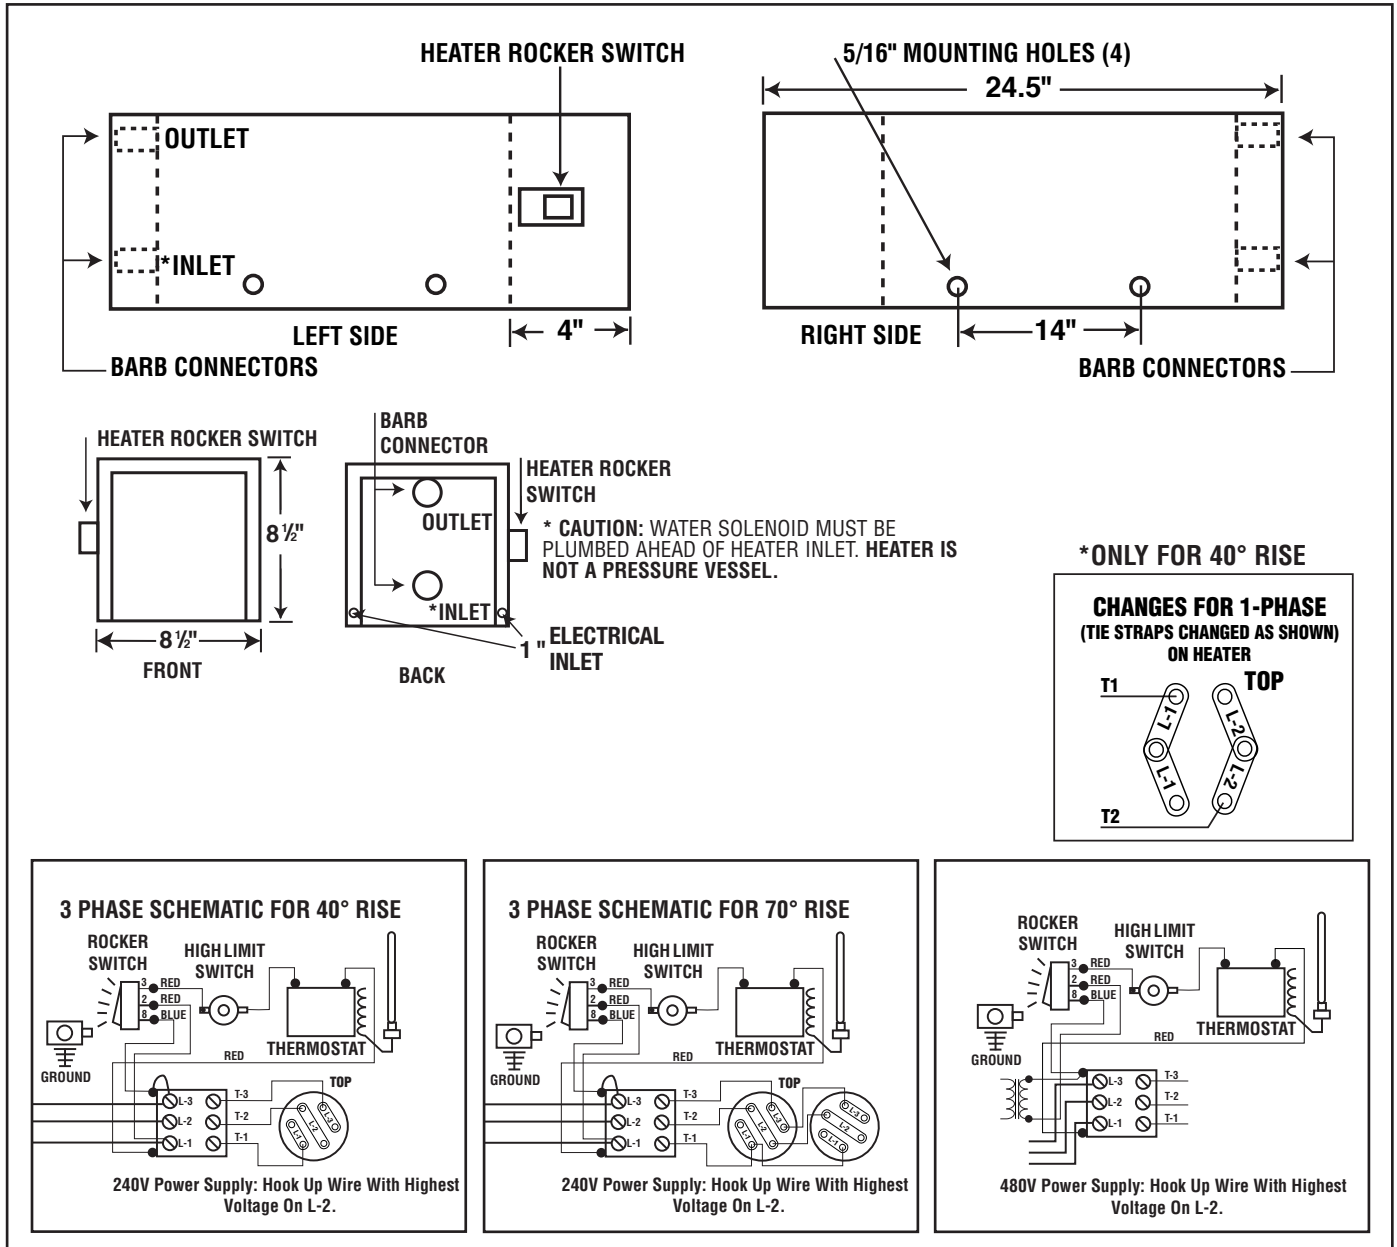

Specifications:

MODEL CMA E-TEMP	USA	METRIC	
AVAILABLE HOT WATER	119 GPH	(450 LPH)	
HEATER TANK CAPACITY	3.9 GAL	40	
9kW @ 208V, 12kW @ 240V, 40°F RISE BOOSTER HEATER (ONE HEATING ELEMENT) OR 12kW @ 480V 40° RISE			
MIN. INCOMING WATER TEMP. RISE	140°F(60°C) 40°F	(22°C)	
ELECTRICAL RATING	VOLTS	PHASE	AMPS
	208	1	43
	240	1	50
	208	3	25
	240	3	29
	480	3	15

15kW @ 208V, 20kW @ 240V, 70°F RISE BOOSTER HEATER (TWO HEATING ELEMENTS) OR 18kW @ 480V 70° RISE			
MIN. INCOMING WATER TEMP. RISE	110°F 70° F	(43° C) (39° C)	
ELECTRICAL RATING*	VOLTS	PHASE	AMPS
	208	3	42
	240	3	48
	480	3	22
*THE TWO ELEMENTS, 70°F RISE WILL BE AVAILABLE IN 3 PHASE ONLY.			