


Autostart

Automatic drain

Automatic delime function

1 year parts and labor warranty

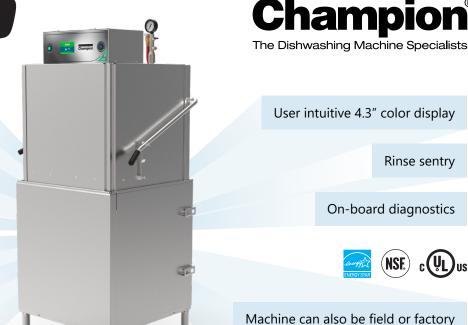

Rendered image is for general visual representation only. Please refer to specifications for the latest detailed product information.

3000 Series

- Advanced 4.3" TFT Display Intuitive condition alerts with multi-lingual, user-friendly operational guidance
- Enhanced Visual On-Board Diagnostics Quickly identify machine faults for rapid resolution and less downtime
- Varicycle Allows user to extend wash time up to 16 minutes for maximum cleaning of heavily soiled wares
- ENERGY STAR® Certified
- 60 Racks Per Hour
- Racks (Peg & Flat)

- Drain water tempering kit (mounted)
- Corner operation splash baffle
- Champion ION scale prevention system
- Built-in booster configured to ensure 180° rinse
- Water hammer kit (unmounted)
- Pumped drain

- 0.76 Gallons Per Rack
- Automatic Delime Function
- Automatic Drain Valve Heavy duty, gear driven, full port ball valve, stainless and brass construction
- Rinse Sentry Automatically extends wash cycle until booster reaches optimal sanitization temperature before final rinse begins
- Auto Start Machine automatically starts when the door is closed
- Field Convertible Electric Ability to convert from three phase to single phase power, 208 or 240 Volt compatible
- Standard Single Point Connection
- Vent Fan, Detergent, Rinse Aid Signal Provided
- Flexible Configuration Options Can be field configured for corner or straight through operation
- Low Water Tank Heat Protection
- Factory Authorized Startup

Champion Industries 3765 Champion Blvd, Winston-Salem, NC 27105 Tel: (800) 532-8591 Fax: (336) 661-1979 www.championindustries.com



Rinse sentry

On-board diagnostics

converted to display French/English

and Fahrenheit/Celsius.