

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400  
 Approved \_\_\_\_\_  
 Date \_\_\_\_\_

# S-150 • S-200 • S-250 Ice Dispensers



Servend's S-Series ice dispensers feature a no-hassle one-piece structural base, strengthened drive train, and modular design, all resulting in a more durable ice dispenser.

## Standard Features


- Servend's patented paddle wheel ice dispense technology maximizes counter space.
- One-piece ABS base provides a solid foundation as well as adding structural rigidity to the dispenser.
- Enhanced agitation and drive system provides consistent ice dispense and ease of serviceability.
- Patented Rocking Chute™ simplifies ice dispensing and storage.
- Surround View™ merchandiser with attractive "ice" graphics draws customer attention.



S-150 • S-200 • S-250 Ice Dispensers

## Specifications

	S-150	S-200	S-250
Standard Features	Lighted merchandiser, Ice graphics, leg kit, and drain kit.		
Approx. Shipping Weights	185.12 lbs. / 69.09 kgs.	235 lbs. / 107 kgs.	260 lbs. / 152 kgs.
Countertop Weight (w/o ice)	133.12 lbs. / 60.38 kgs.	184 lbs. / 69 kgs.	204 lbs. / 118 kgs.
Ice Storage Capacity	Up to 150 lbs. / 68 kgs.	Up to 200 lbs. / 91 kgs.	Up to 250 lbs. / 114 kgs.
Electrical Requirements	Dispenser: 120V/60Hz/2.8FLA. 220V/50Hz/1 also available.		
Drain	Single 0.75" (1.91 cm) PVC (N.P.T.) drain fitting extends from drain pan Units can be drained from the bottom or back of unit.		
Ice Machine Compatibility	Manual fill or top-mount with compatible ice machines. Contact MBE for adapter kit requirements for top-mounted ice machine applications.		
Options	Extended front splash panel, Flomatic water valve and side splash panels.		

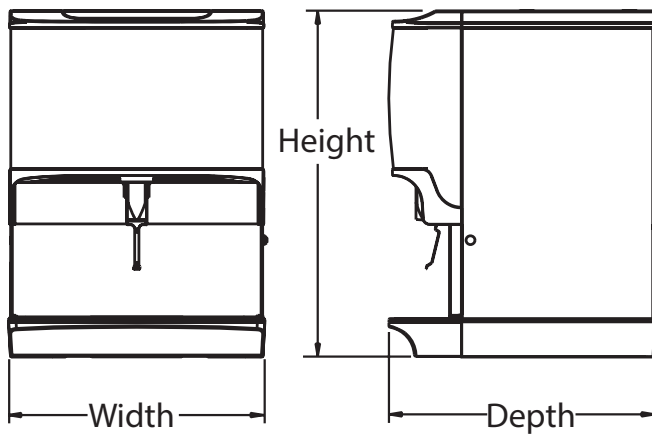

	S-150	S-200	S-250
Width	23.00"	30.00"	30.00"
	58.42 cm	76.20 cm	76.20 cm
Depth	31.13"	31.13"	31.13"
	79.07 cm	79.07 cm	79.07 cm
Height*	34.88"	34.88"	40.88"
	88.60 cm	88.60 cm	103.8 cm

\*Height dimension without full lid.  
Add .50" (1.27 cm) for full lid.

Welbilt reserves the right to make changes to the design or specifications without prior notice.