


Electronic Faucets 5EF-1D-DG-VF05

TAC	
IAG:	

Electronic Sensor Faucet

Architect/Engineering Specifications:

Single hole deck mount electronic sensor faucet with polished chrome plated brass body and 5 11/16" rigid gooseneck, 0.5 GPM vandal resistant non-aerated spray device, AC/DC control module, temperature control mixing valve with integral check valves and 18" flexible stainless steel supply hoses with 3/8" compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372 and UL 1951. Meets ADA ANSI/ICC A117.1 requirements.

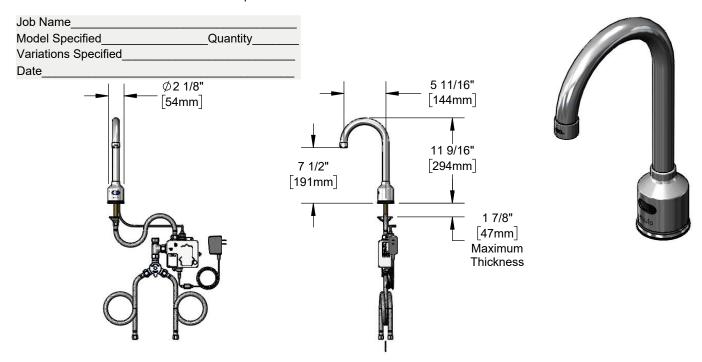

Features & Benefits:

- Single hole deck mount faucet w/ polished chrome plated brass body
- 5 11/16" rigid gooseneck
- 0.5 GPM vandal resistant non-aerated spray device, Series 6 (B-0199-06-N05)
- Water resistant control module
- Plug in AC transformer or (4) AA battery (DC) power options
- Mechanical temperature mixing valve w/ integral check valves
- 18" flexible stainless steel supply hoses w/ 3/8" compression connections
- Low battery LED indicator light
- Material: Polished chrome plated brass body & tubular spout

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)
- UL 1951

Warranty: One Year (Limited)





Performance Data:

Pressure: 20 - 125 psi

Temperature: 40°F - 140°F

Flow Rate: 0.5 GPM @ 60 psi

Water Consumption: @ 10 sec = .08 gal @ $15 \sec = .13 \text{ gal}$



ADA Compliant

Optional Outlets (Series 1 / VR Series 6)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)	Optional Deck Plates
0.35	N/A	□ B-0199-01-N035	N/A	□ B-0199-06-N035	□ 4" Chrome Plated Brass Deck Plate
0.5	N/A	□ B-0199-01-N05	N/A	Standard	□ 8" Chrome Plated Brass Deck Plate
1.0	□ B-0199-01-F10	N/A	□ B-0199-06-F10	N/A	
1.5	□ B-0199-01-WS	□ B-0199-29	□ B-0199-06-W	□ B-0199-29VR	
22	□ B-0199-01	□ B-0199-21	□ B-0199-06	□ B-0199-21-VRF	







equip Foodservice Accessories

