

Swivel Sink and Pantry Faucets B-0200-44H-VB


TAG:	

Double Pantry Washdown Faucet

Architect/Engineering Specifications:


Single hole deck mount mixing faucet with polished chrome plated brass body, 90° swivel adapter, 3/8" NPT vacuum breaker, 44" flexible stainless steel hose, heat resistant handle, 1.42 GPM angled spray valve, compression cartridges with spring checks, lever handles, 18" flexible stainless steel supply hoses w/ 1/2" NPSM male inlets and wall hook. ASME A112.18.1 / CSA B125.1, NSF 61-Section 9 and NSF 372. EPAct 2005 compliant.

Job Name		
Model Specified	Quantity	
Variations Specified		
Date		



Features & Benefits:

- Single hole deck mount mixing faucet w/ polished chrome plated brass body
- 90° swivel adapter
- 3/8" NPT vacuum breaker
- 44" flexible stainless steel hose w/ heat resistant gray handle and hold down ring
- 1.42 GPM angled spray valve
- Quarter-turn Eterna compression cartridges w/ spring checks to prevent cross flow of water
- Lever handles w/ color coded indexes
- 18" flexible stainless steel supply hoses w/ 1/2" NPSM male inlets
- Wall hook holds spray valve when not in use
- Material: Polished chrome plated brass body, spray valve body & tubular adapter, stainless steel hose and chrome plated metal handles

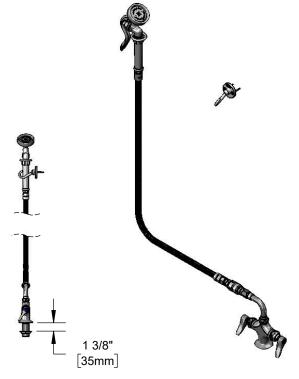

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- EPAct 2005 (PRSV)
- CSA B64.8

Warranty: One Year (Limited)

Performance Data:

Pressure: 20 - 125 psi Temperature: 40 °F - 140 °F Flow Rate: 1.42 GPM @ 60 psi

Optional Handles

- ☐ 4" Wrist Action
- □ Lever (Standard)
- □ 4-Arm

Optional Cartridges With Checks

- □ Quarter-Turn Cerama w/ Check Valve
- □ Quarter-Turn Eterna w/ Spring Check (Standard)

Optional Pre-Rinse Spray Valves

- □ B-0107 (1.42 GPM)
- □ B-0107-C (0.65 GPM)
- □ B-0107-J (1.07 GPM)
- □ B-0108 (1.07 GPM)
- □ B-0108-Č (0.65 GPM)









