

# Swivel Sink and Pantry Faucets B-0205-44H-VB


TAG:	


# Single Pantry Washdown Faucet


### **Architect/Engineering Specifications:**

Single hole single temperature deck mount mixing faucet with polished chrome plated brass body, 90° swivel adapter, 3/8" NPT vacuum breaker, 44" flexible stainless steel hose, heat resistant handle, 1.42 GPM angled spray valve, compression cartridges with spring checks, lever handles, 1/2" NPSM male inlets and wall hook. ASME A112.18.1 / CSA B125.1, NSF 61-Section 9 and NSF 372. EPAct 2005 compliant.

Job Name	
Model Specified	Quantity
Variations Specified	
Date	





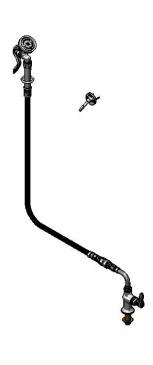

# Features & Benefits:

- Single hole single temperature deck mount mixing faucet w/ polished chrome plated brass body
- 90° swivel adapter
- 3/8" NPT vacuum breaker
- 44" flexible stainless steel hose w/ heat resistant gray handle and hold down ring
- 1.42 GPM angled spray valve
- Quarter-turn Eterna compression cartridge w/ spring check
- Lever handle w/ color coded index
- 1/2" NPSM male inlet

**Optional Handles** 

☐ 4" Wrist Action

□ 4-Arm

□ Lever (Standard)

- Wall hook holds spray valve when not in use
- Optional tailpieces and nuts for 1/4" NPT male connections
- Material: Polished chrome plated brass body, spray valve body & tubular adapter, stainless steel hose and chrome plated metal handle

#### **Product Compliance:**

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- EPAct 2005 (PRSV)
- **CSA B64.8**

Warranty: One Year (Limited)

#### **Performance Data:**

Pressure: 20 - 125 psi Temperature: 40 °F - 140 °F Flow Rate: 1.42 GPM @ 60 psi

## **Optional Pre-Rinse Spray Valves**

- □ B-0107 (1.42 GPM)
- □ B-0107-C (0.65 GPM)
  □ B-0107-J (1.07 GPM)
- □ B-0108 (1.07 GPM)
- □ B-0108-C (0.65 GPM)










**Optional Cartridges With Checks** 

□ Quarter-Turn Cerama w/ Check Valve

□ Quarter-Turn Eterna w/ Spring Check (Standard)



• Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

