
TAG:	

Workboard Mixing Faucet

Architect/Engineering Specifications:

4" deck mount mixing faucet with chrome plated brass body, 8" swing nozzle with 2.2 GPM aerator, ceramic cartridges with check valves, lever handles, 1/2" NPT male inlets, chrome plated escutcheon and sidespray with 4 ft. hose and hose guide. Certified to ASME A112.18.1/CSA B125.1,

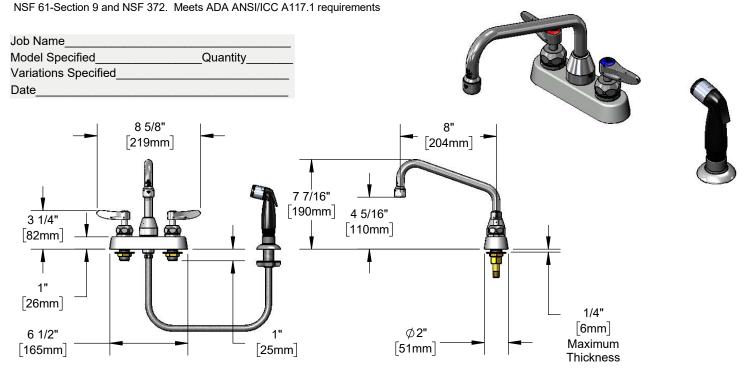

Features & Benefits:

- 4" deck mount mixing faucet w/ chrome plated brass body
- 8" swing nozzle
- 2.2 GPM, Series 1 (B-0199-01)
- Quarter-turn Cerama cartridges with check valves to prevent cross flow of water
- Lever handles w/ color coded indexes
- 1/2" NPT male inlets
- Tailpieces and nuts for 1/4" NPT male connections
- Chrome plated escutcheon
- Sidespray with 4 ft. vinyl hose and hose guide
- Material: Chrome plated brass body & tubular spout, thermoplastic sidespray body and chrome plated metal handles & escutcheon

Product Compliance:



- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

Cerama Cartridge: Lifetime (Limited)

Performance Data:

Pressure: 20 - 125 psi

Temperature: 40°F - 140°F

Flow Rate:

Nozzle: 2.2 GPM @ 60 psi Sidespray: 2.2 GPM @ 60 psi







Optional Outlets (Series 1 / VR Series 6)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)	Optional Handles
0.35	N/A	□ B-0199-01-N035	N/A	□ B-0199-06-N035	☐ 4" Wrist Action
0.5	N/A	□ B-0199-01-N05	N/A	□ B-0199-06-N05	□ Lever (Standard)
1.0	□ B-0199-01-F10	N/A	□ B-0199-06-F10	N/A	Optional Cartridges With Checks
1.2	□ B-0199-01-F12	□ B-0199-01-LF12	□ B-0199-06-F12	□ B-0199-06-LF12	
1.5	□ B-0199-01-WS	□ B-0199-29	□ B-0199-06-WS	□ B-0199-29VR	□ Quarter-Turn Cerama w/ Check Valve (Standard)
2.2	Standard	□ B-0199-21	□ B-0199-06	□ B-0199-21-VRF	□ Quarter-Turn Eterna w/ Spring Check







