

# W8

## Vacuum Packers



**W8 30 DX EASY**



**W8 50 DX S+G**



**W8 70 DX TB**

Exclusively designed with simple to use controls and a reduced workspace  
 5mm thick, AISI 304 stainless steel, easy to clean plain vacuum chamber  
 Thick transparent plexiglass lid for viewing the process from start to finish  
 Removable sealing bar  
 Complete electronic control system  
 EASY models have simplified control board

### Models:

W8 30 DX EASY - 12" Seal Bar - 9 m<sup>3</sup>/h (318 ft<sup>3</sup>/h) Pump

W8 30 DX - 12" Seal Bar - 9 m<sup>3</sup>/h (318 ft<sup>3</sup>/h) Pump

W8 40 DX EASY - 16" Seal Bar - 14 m<sup>3</sup>/h (495 ft<sup>3</sup>/h) Pump

W8 40 DX - 16" Seal Bar - 24 m<sup>3</sup>/h (848 ft<sup>3</sup>/h) Pump

W8 50 DX - 20" Seal Bar - 24 m<sup>3</sup>/h (848 ft<sup>3</sup>/h) Pump

W8 50 DX S+G - 20" Seal Bar - 24 m<sup>3</sup>/h (848 ft<sup>3</sup>/h) Pump - w/ Inert Gas Flush & Soft-air

W8 50 DX DB - 2x16" left and right Seal Bars - 24 m<sup>3</sup>/h (848 ft<sup>3</sup>/h) Pump

W8 70 DX TB - Floor model, 3 Seal Bars design: 1x25 1/4" and 2x16" - 48 m<sup>3</sup>/h (1,695 ft<sup>3</sup>/h) Pump

### Optionals:

Thermal Label Printer - not available on EASY Versions

12" Seal Bar with Cut-Off Wire

16" Seal Bar with Cut-Off Wire

20" Seal Bar with Cut-Off Wire

Reinforced Gastronorm Containers and Lids

External Vacuum Hose - to be used with our Reinforced Gastronorm Containers and Lids

Plexiglas Surface, W8 30

Plexiglas Surface, W8 40 and W8 50

SIRMAN USA, Inc.  
9490 Franklin Avenue  
Franklin Park, IL 60131 U.S.A.

+1 (847) 288-9500  
+1 (847) 288-9501 fax  
(866) 643-6872 toll free

sirmanusa@sirman.com  
www.sirman.com








Thermal label printer



Reinforced Gastronorm Containers and Lids



External Vacuum Hose

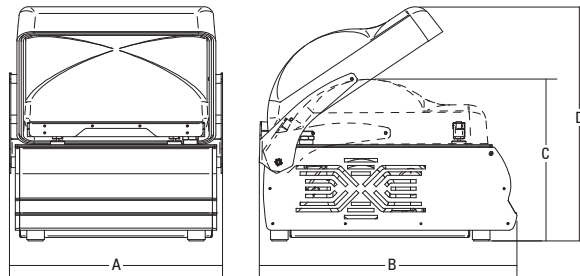

	Power	Power source	Vacuum pump	Sealing bar	Chamber dimensions	Chamber dimensions								Net weight	Shipping	Gross weight
	Kw		mc/h	mm		A	B	C	D	E	F	G	H			
<b>W8 30 Easy DX</b>	0,35	120V/60Hz	8	310	340x360 h.150	402	525	370	480	334	340	85	160	38	720x570x770	48
<b>W8 30 DX</b>	0,35	120V/60Hz	9	310	340x360 h.150	402	525	370	480	334	340	85	160	38	720x570x770	48
<b>W8 40 Easy DX</b>	0,75	120V/60Hz	14	410	430x410 h.160	493	585	370	480	334	430	85	170	56	760x640x770	66
<b>W8 40 DX</b>	0,75	120V/60Hz	24	410	430x410 h.160	493	585	370	542	390	430	85	170	56	760x640x770	66
<b>W8 50 DX</b>	0,75	120V/60Hz	24	510	545x460 h.190	609	640	420	605	430	540	90	210	70	840x870x750	86
<b>W8 50 DX DB</b>	0,75	120V/60Hz	24	410x2	545x460 h.190	609	640	420	605	424	428	90	210	75	840x870x750	87
<b>W8 70 DX 40 TB</b>	1,1	220V/60Hz	48	640x1 / 410x2	780x490 h.190	860	860	520	670	424	660	90	210	115	-	-