



ASC-2E
with
Mobile Stand Option 5004687



ASC-4E
with
Stand Option 5003489

PLATINUM SERIES

ASC-2E

ASC-4E

Manual Control

- **Installation**
- **Operation**
- **Maintenance**

W164 N9221 Water Street • P.O. Box 450
Menomonee Falls, Wisconsin 53052-0450 U.S.A.

PHONE: 262.251.3800 • 800.558.8744 U.S.A. / CANADA
FAX: 262.251.7067 • 800.329.8744 U.S.A. ONLY
www.alto-shaam.com



Consult instructions
for operation and use.



Table of Contents

Warranty and Service Information	3
Delivery	4
Transportation Damage and Claims	5
Unpacking	6
Safety Procedures.....	7
Installation	9
Dimensions.....	11
Accessories	12
Electrical Connection	13
Stacking and Venting.....	14
Operation	17
Cleaning and Preventative Maintenance.....	21
Troubleshooting.....	23
Service.....	24
Limited Warranty.....	Back cover

Enjoy your Alto-Shaam Convection Oven!

Platinum Series

Platinum Series gas and electric convection ovens offer quick baking and roasting with easy-to-use controls. The Platinum Series gas oven features a unique,transverse-flow burner system producing rapid heat recover for uniform flow resulting in even cooking without the need to rotate pans. Controlled velocity air also enhances product finish without loss of food quality.

Protect your original manufacturer's warranty

Register

Registering your appliance ensures prompt service in the event of a warranty claim. You will also receive direct notifications of software updates and additional product information.

Your personal information will not be shared with any other company.

www.alto-shaam.com/warranty

Alto-Shaam 24/7 Emergency Repair Service

Call

Call 800-558-8744 to reach our 24-hour emergency service call center for immediate access to local authorized service agencies outside standard business hours. The emergency service access is provided exclusively for Alto-Shaam equipment and is available throughout the United States through Alto-Shaam's toll free number.

Availability

Emergency service access is available seven days a week, including holidays.

Delivery

This Alto-Shaam appliance has been thoroughly tested and inspected to ensure only the highest quality appliance is provided. Upon receipt, check for any possible shipping damage and report it at once to the delivering carrier. See Transportation Damage and Claims section located in this manual.

This appliance, including unattached items and accessories, may be delivered in one or more packages. Ensure all standard items and options have been received with each appliance as ordered. Save all the information packed with the appliance. Register the appliance online at www.alto-shaam.com/en/support/warranty-registration to ensure prompt service in the event of a warranty parts and labor claim.

This manual must be read and understood by all people using or installing the appliance. Contact the Alto-Shaam Tech Team Service Department if you have any questions concerning installation, operation, or maintenance.

1-800-558-8744; servicedept@alto-shaam.com

The serial number is required for all inquiries.

Always include both model and serial number(s) in any correspondence regarding the appliance.

Model: _____

Serial number: _____

Purchased from: _____

Date installed: _____ **Voltage:** _____



CAUTION



Appliance and accessories may be heavy. To prevent serious injury, **always** use a sufficient number of trained and experienced workers when moving or leveling appliance and handling accessories.

Environmental Conditions

Operational Environmental Conditions

- Before use, appliance must acclimate to room temperature in the environment it is placed – 24 hours is recommended.
- Ambient temperature range of 60°F to 110°F (16°C to 43°C).
- Relative humidity of less than 95% non-condensation.
- Atmospheric pressure range of 50kPa to 106kPa.

Transportation Damage and Claims



All Alto-Shaam equipment is sold Free on Board (F.O.B.) shipping point, and when accepted by the carrier, such shipments become the property of the consignee.

Should damage occur in shipment, do not put the appliance into service until the damage has been inspected by an authorized Alto-Shaam service provider.

Shipping damages are a matter between the carrier and the consignee. In such cases, the carrier is assumed to be responsible for the safe delivery of the merchandise, unless negligence can be established on the part of the shipper.

1. Make an immediate inspection while the appliance is still in the truck or immediately after it is moved to the receiving area. Do not wait until after the appliance is moved to a storage area.
2. Do not sign a delivery receipt or a freight bill until a proper count has been made and inspection of all appliances are received.

3. Note all damage to packages directly on the carrier's delivery receipt.
4. Make certain the driver signs the delivery receipt. If the driver refuses to sign, make a notation of this refusal on the receipt.
5. If the driver refuses to allow inspection, write the following on the delivery receipt: **Driver refuses to allow inspection of containers for visible damage.**
6. Contact the carrier's office immediately upon finding damage, and request an inspection. Mail a written confirmation to the carrier's office with the time, date, and the person called.
7. Save any packages and packing material for further inspection by the carrier.
8. Promptly file a written claim with the carrier and attach copies of all supporting paperwork.

Alto-Shaam will continue our policy of assisting our customers in collecting claims which have been properly filed and actively pursued. Alto-Shaam cannot, however, file any damage claims, assume the responsibility of any claims, or accept deductions in payment for such claims.

Record the model and serial number of the appliance for easy reference. Always refer to both model and serial number in any contact with Alto-Shaam regarding this appliance.

Model: _____

Serial Number: _____

Date Installed: _____

Voltage: _____

Purchased From: _____



Alto-Shaam has established a twenty-four hour emergency service call center to offer immediate customer access to a local authorized service agency outside of standard business hours. The emergency service access is provided exclusively for Alto-Shaam equipment and is available throughout the United States through the use of Alto-Shaam's toll-free number. Emergency service access is available seven days a week including holidays.


Unpacking

- Carefully remove the appliance from the carton or crate.

NOTE: Do not discard the carton and other packaging material until you have inspected the appliance for hidden damage and tested it for proper operation.

Do not discard this manual. This manual is considered to be part of the appliance and is to be provided to the owner or manager of the business or to the person responsible for training operators. Additional manuals are available from the manufacturer.

- Read all instructions in this manual carefully before installing this appliance, using the appliance or performing routine maintenance. Following procedures other than those indicated in this guide to use and clean the appliance is considered inappropriate and may cause damage, injury or fatal accidents, in addition to voiding the warranty and relieving Alto-Shaam of all liability.
- Remove all protective plastic film, packaging materials, and accessories from the appliance before connecting electrical power. Store any accessories in a convenient place for future use.

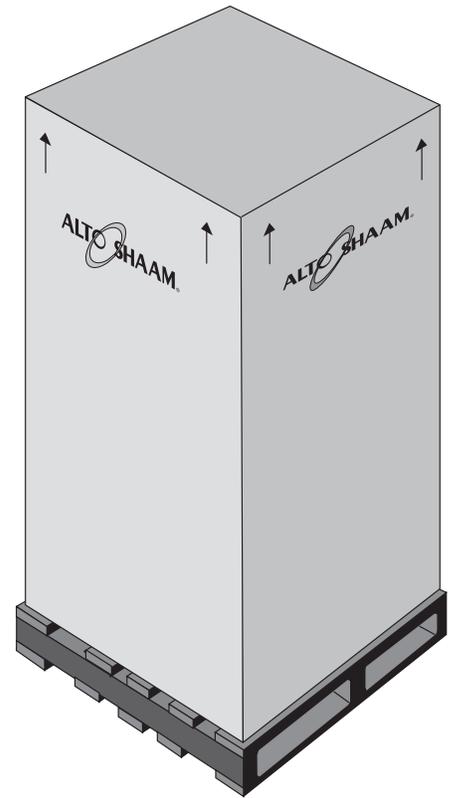

- The appliance is intended to cook, hold or process foods for the purpose of human consumption. No other use for this appliance is authorized and is therefore considered dangerous. The appliance must not be used to cook food containing flammable materials (such as food with alcohol). Substances with a low flash point can ignite spontaneously and cause a fire.
- The appliance is intended for use in commercial establishments where all operators are familiar with the purpose, limitations, and associated hazards of this appliance. Operating instructions and warnings must be read and understood by all operators and users. Alto-Shaam recommends regular staff training to avoid the risk of accident or damage to the appliance. Operators must also receive regular safety instructions.
- Any troubleshooting guides, component views, and parts lists included in this manual are for general reference only and are intended for use by qualified and trained technicians.
- This manual should be considered a permanent part of this appliance. This manual and all supplied instructions, diagrams, schematics, parts lists, notices, and labels must remain with the appliance if the item is sold or moved to another location.

Knowledge of proper procedures is essential to the safe operation of electrically and/or gas energized equipment. The following signal words and symbols may be used throughout this manual.

DANGER

Indicates a hazardous situation that, if not avoided, will result in death or serious injury.

WARNING

Indicates a hazardous situation that, if not avoided, could result in death or serious injury.

CAUTION

Indicates a hazardous situation that, if not avoided, could result in minor or moderate injury.

NOTICE: Indicates information considered important, but not hazard-related (e.g., messages relating to property damage).



Indicates that referral to operating instructions is recommended to understand operation of equipment.

NOTICE: For equipment delivered for use in any location regulated by the following directive: 2012/95/EC WEEE



Do not dispose of electrical or electronic equipment with other municipal waste.

Safety Procedures

- To prevent serious injury, death or property damage, the appliance should be inspected and serviced at least every twelve (12) months by an authorized service partner or trained technician.
- **Only** allow an authorized service partner or trained technician to service or to repair the appliance. Installation or repairs that are not performed by an authorized service partner or trained technician, or the use of non-factory authorized parts will void the warranty and relieve Alto-Shaam of all liability.
- When working on this appliance, observe precautions in the literature, on tags, on labels attached to or shipped with the appliance and other safety precautions that may apply.
- If the appliance is installed on casters, freedom of movement of the appliance must be restricted so that utility connections (including gas, water, and electricity) cannot be damaged when the appliance is moved. If the appliance is moved, ensure that all utility connections are properly disconnected. If the appliance is returned to its original position, ensure that retention devices and utility connections are properly connected.
- **Only** use the appliance when it is stationary. Mobile appliance racks, mobile plate racks, transport trolleys, and appliances on casters can tip over when being moved over an uneven floor or threshold and cause serious injury.
- **Always** apply caster brakes on mobile appliances or accessories when these are not being moved. These items could move or roll on uneven floors and cause property damage or serious injury.

WARNING

This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision concerning use of the appliance by person responsible for their safety.

Children should be supervised to ensure that they do not play with the appliance.

⚠ WARNING

Improper installation, alteration, adjustment, service, cleaning, or maintenance could result in property damage, severe injury, or death.

Read and understand the installation, operating and maintenance instructions thoroughly before installing, servicing, or operating this equipment.

CAUTION

⚠ Do not lift or move the oven by using the doors or the door handles.

⚠ CAUTION

To prevent **personal injury** or **property damage**:


Always use hand protection when operating this appliance to avoid burns. Metal parts of this equipment become extremely hot when in operation.

⚠ WARNING

To prevent personal injury, death or property damage:

Do not store or use gasoline or other flammable vapors or liquids in the vicinity of this or any other appliance.

The Alto-Shaam convection oven must be installed in a location that will permit the oven to function for its intended purpose and to allow adequate clearance for ventilation, proper cleaning, and maintenance.

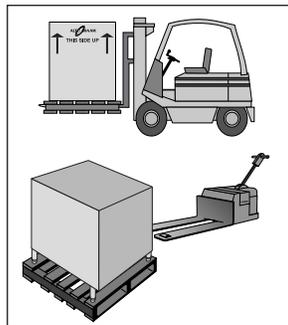

1. Hood installation is recommended (check local codes).
2. The oven must be installed on a stable and level surface.
3. **Do not** install this oven in any area where it may be affected by any adverse conditions such as steam, grease, dripping water, high temperatures, etc.
4. **Do not** store or use any flammable liquids or allow flammable vapors in the vicinity of this oven or any other appliance.
5. This appliance must be kept free and clear of any combustible materials.
6. This appliance must be kept free and clear of any obstructions blocking access for maintenance or service.

ASC-2E • Weight	
Net: 203 lb (92 kg)	Ship: 278 lb (126 kg)
Crate dimensions: L x W x H 35" x 35" x 41" (889mm x 889mm x 1041mm)	
Minimum entry clearance: 31-1/2" (800mm) uncrated	
ASC-2E • Dimensions: H x W x D	
Exterior: 32-1/8" x 30" x 30-1/8" (815mm x 762mm x 765mm)	
Interior: 20" x 15" x 21" (508mm x 381mm x 533mm)	

ASC-4E • Weight	
Net: 490 lb (222 kg)	Ship: 535 lb (243 kg)
Crate dimensions: L x W x H 53" x 45" x 49" (1346mm x 1143mm x 1245mm)	
Minimum entry clearance: 31-1/2" (800mm) uncrated	
ASC-4E • Dimensions: H x W x D	
Exterior: 57-1/2" x 38" x 44-1/2" (1461mm x 965mm x 1130mm)	
Interior: 24" x 29-1/8" x 25" (610mm x 740mm x 635mm)	

Minimum clearance requirements	
Back:	0" (0mm)
Left side:	2" (51mm)
Right side:	2" (51mm)
From grease producing equipment:	6" (152mm)
Recommended service access:	20" (508mm) right side

Installation

The oven must be mounted on the factory equipped oven legs or on an optional oven stand. Installation on a solid or concrete base that in any way restricts air flow may void the warranty.

All clearances for a proper ventilation air supply must be maintained to minimize fire hazard. Do not locate the oven immediately adjacent to any other heat-generating appliance.

! WARNING

Improper installation, alteration, adjustment, service, cleaning, or maintenance could result in property damage, severe injury, or death.

Read and understand the installation, operating and maintenance instructions thoroughly before installing, servicing, or operating this equipment.

A number of adjustments are associated with initial installation and start-up. Adjustments must be conducted by a qualified service technician. Installation and start-up adjustments are the responsibility of the dealer or user. These adjustments include but are not limited to thermostat calibration, door adjustment, and leveling. The Platinum series oven burners are factory-adjusted with fixed air openings and require no field adjustment.

Leveling

The oven should be leveled before the gas supply is connected.

Level the oven from side-to-side and front-to-back with the use of a spirit level. For ovens installed on a mobile stand, it is important that the floor surface be level due to the probability of frequent oven repositioning.

We recommend checking the level of the oven periodically to make certain the floor has not shifted nor the oven moved.



! CAUTION



Appliance and accessories may be heavy. To prevent serious injury, **always** use a sufficient number of trained and experienced workers when moving or leveling appliance and handling accessories.

Restraint Requirements —Mobile Equipment

! WARNING

RISK OF ELECTRIC SHOCK.




Appliance must be secured to building structure. Failure to observe this precaution may result in damage to the equipment and severe personal injury.

Any appliance that is not furnished with a power supply cord but includes a set of casters must be provided with a tether. Adequate means must be provided to limit the movement of this appliance without depending on or transmitting stress to the electrical conduit. The following requirements apply:



1. Casters must be a maximum height of 6" (152mm).
2. Two of the casters must be the locking type.
3. Such mobile appliances or appliances on mobile stands must be installed with the use of a flexible connector secured to the building structure.

A mounting connector for a restraining device is located on the lower back flange of the appliance chassis or on an oven stand, approximately 18" (457mm) from the floor. A flexible connector is not supplied or available from the factory.

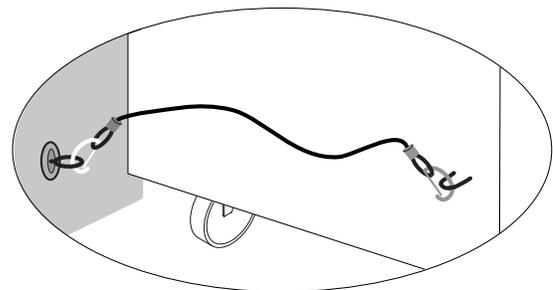



Where automatically operated appliances are vented through a ventilating hood or exhaust system equipped with a damper or with a power means of exhaust, provisions shall be made to allow the equipment to operate only when the damper is open to a position to properly vent the appliance and when the power means of exhaust is in operation. Accordance with NFPA 54 commonwealth of massachusetts only.

ASC-2E

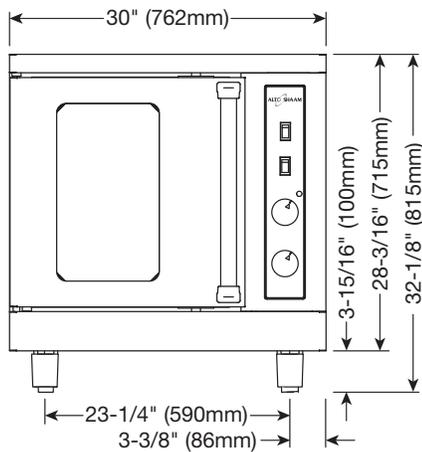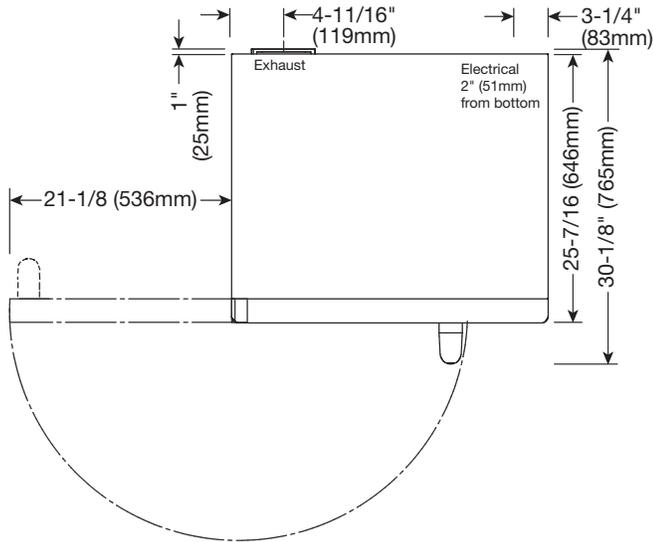

Product/Pan Capacity
27 lb (12 kg) maximum — 17 qts (15 liters)
Nine (9): 18" x 13" x 1" half-size sheet pans
5 chrome plated wire shelves with 2 removable side racks and 9 shelf positions spaced at 1-5/8" (41mm)

ASC-4E

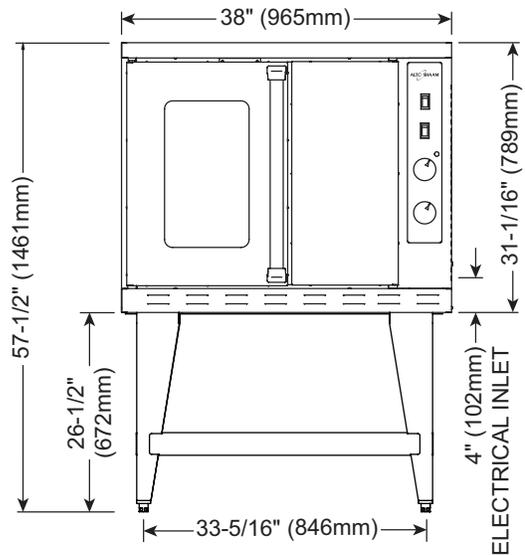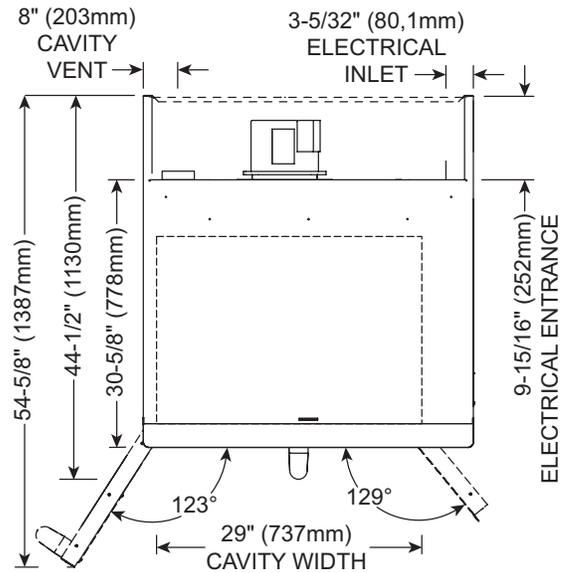

Product/Pan Capacity
72 lb (33 kg) maximum • 45 qts (43 liters)
Twelve (12): 18" x 26" x 1" full-size sheet pans
6 chrome plated wire shelves with 2 removable side racks and 12 shelf positions spaced at 1-3/4" (43mm)

Accessories

Accessories - ASC-2E	
<input type="checkbox"/> Caster Kit, 6" (152mm)	5013871
Leg Kit, 4" (102mm)	
<input type="checkbox"/> Seismic feet	5004688
Leg Kit	
<input type="checkbox"/> with Bullet feet, 19-1/2" (495mm) height	5005169
<input type="checkbox"/> with Seismic feet, 19-1/2" (495mm) height	5005168
<input type="checkbox"/> with Casters, 23" (584mm) height	5005181
<input type="checkbox"/> Shelf, Oven Rack	SH-26894
Stacking Hardware	
See individual stacking combination specification sheets	
Security Device (for correctional facility use)	
Includes door lock (padlock not included), security screw package, sealed rivet, security control cover	
	5020698
Stand, Single Oven	
<input type="checkbox"/> with Bullet feet, 26-1/2" (673mm) height	5004672
<input type="checkbox"/> with Seismic feet, 26-1/2" (673mm) height	5005172
<input type="checkbox"/> with Casters, 30" (762mm) height	5004687

Accessories - ASC-4E	
<input type="checkbox"/> Caster Kit, 6" (152mm)	5003790
For mobile stack applications	
<input type="checkbox"/> Cooling Rack (for oven stand)	5003791
Leg Kit (4)	
<input type="checkbox"/> 6" (152mm) with Bullet Feet	5003794
<input type="checkbox"/> 6" (6152mm) with Seismic Feet	5003795
<input type="checkbox"/> 25" (635mm) with Seismic Feet	5003785
<input type="checkbox"/> Panel For Back , Stainless Steel	5005876
Shelf, Oven Rack	
<input type="checkbox"/> Interchangeable with cooling rack	SH-26795
Stacking Hardware	
See individual stacking combination specification sheets	
Security Device (for correctional facility use)	
Includes security back panel, door locking has (padlock not included), security screw package, security control cover	
	5020688
Stand, Stainless Steel	
<input type="checkbox"/> Mobile, with Cooling Racks & Casters, 38" H (965mm)	5003786
<input type="checkbox"/> Stationary, with Cooling Racks & Bullet Feet	5003489
<input type="checkbox"/> Stationary, with Cooling Racks & Seismic Feet	5003787
Min: 34-1/4" (870mm) • Max: 35-1/2" (902mm) • H (feet are adjustable)	

WARNING



To prevent **SERIOUS INJURY, DEATH** or **PROPERTY DAMAGE**:

All electrical connections must be made by a qualified and trained service technician in accordance with applicable electrical codes.

CAUTION



Power source must match voltage identified on appliance rating tag. The rating tag provides essential technical information required for any appliance installation, maintenance or repairs. Do not remove, damage or modify the rating tag.

WARNING



To prevent serious injury, death, or property damage:

All electrical connections must be made by a qualified and trained service technician in accordance with applicable electrical codes.



This appliance must be adequately grounded in accordance with local electrical codes or, in the absence of local codes, with the current edition of the National Electrical Code ANSI/NFPA No. 70. In Canada, all electrical connections are to be made in accordance with CSA C22.1, Canadian Electrical Code Part 1 or local codes.



CE-approved appliances include an equipotential-bonding terminal marked with the symbol shown on the left. Provisions for earthing are to be made in accordance with IEC:2010 60335-1 section 27 or local codes.

The oven must be installed by a qualified electrician. This appliance must be branch circuit protected with proper ampacities, in accordance with the wiring diagram located in this manual or in the electrical compartment of the oven. The oven must be properly grounded in accordance with the National Electrical Code and applicable local codes. Plug the unit into a properly grounded receptacle **ONLY**, positioning the unit so that the plug is easily accessible in case of an emergency. Arcing will occur when connecting or disconnecting the unit unless all controls are in the OFF position.

Proper receptacle or outlet configuration or permanent wiring for this unit must be installed by a licensed electrician in accordance with applicable local electrical codes.

Wire size for the main incoming power to the unit must match the minimum size listed in the specifications applicable to the specific oven model. For supply connections, locate the wire size posted on the label located near the electric terminal block behind the service panel or elsewhere listed in this manual. Before attempting the electrical connection, the rating plate should be checked to ensure that the electrical characteristics of the appliance and the electrical supply characteristics agree.

Installation of the wiring must be made in accordance with U.L. 197 Commercial Electric Cooking Appliance Standards, Local and/or National Electrical Code, ANSI /NFPA 70-1990.

Service line entry is made through the rear of the oven for connection to the terminal block. Remove the service panel on the right side of the oven for access to the terminal block.

The oven is wired at the factory for either single phase or three phase service as indicated on the original purchase order. Input voltage and phase must match the voltage and phase of the oven. Visually check all electrical connections.

Electrical - ASC-2E (each oven)					
Voltage	Phase	Cycle/Hz	Awg	Amps	Kw
208	1	60	10	24.0	5.0
240	1	60	10	20.8	5.0
208	3	60	12	13.8	5.0
240	3	60	12	12.0	5.0
No cord or plug					

Electrical - ASC-4E (each oven)					
V	Ph	Hz	Awg	A	Kw
208	1	60	6	50.0	10.4
240	1	60	6	43.3	10.4
208	3	60	8	28.8	10.4
240	3	60	8	25.0	10.4
440-480	3	60	12	13.6	10.4
220	1	50	6	40.0	8.7
No cord or plug					

Note: In stacked configurations, each oven requires its own electrical connection.

Stacking and Venting

Stacking & Venting Assembly (2-ASC-2E/STK Shown)


SCREW SC-2351 QTY2
IN THIS LOCATION ON
BOTTOM UNIT.

REMOVE KNOCKOUT PRIOR
TO STACKING TOGETHER.
BOLT UP AND INTO
TOP UNIT

ADD
1006412
VENT RISER

SCREW SC-26520 QTY 5

REMOVE EXISTING VENT

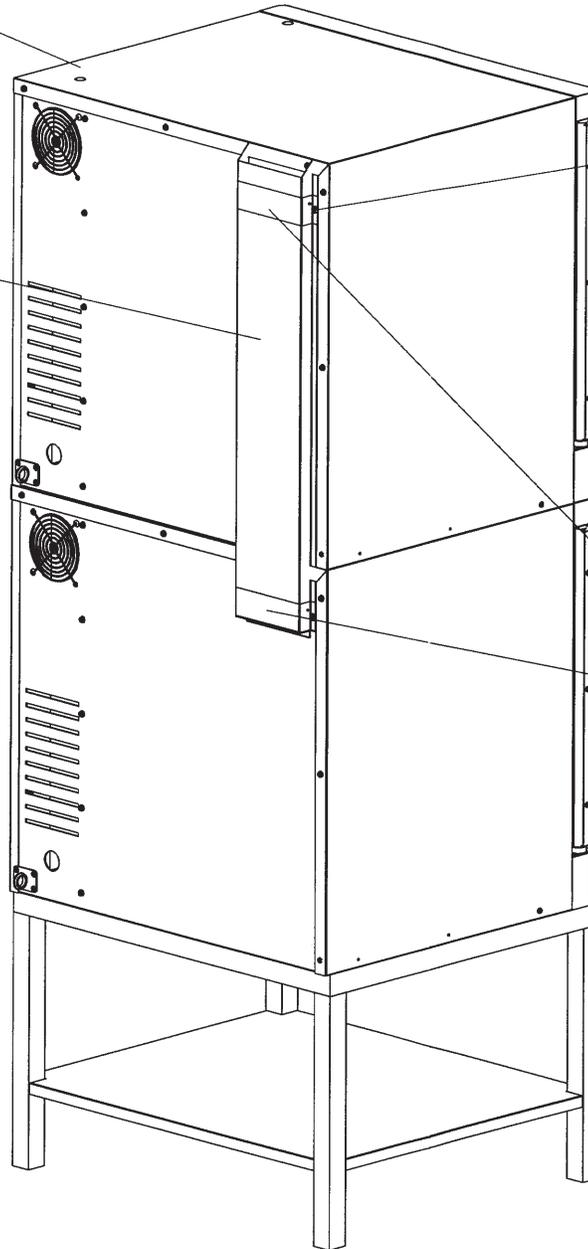

Notice: Actual unit may be
different than shown.


 CAUTION	
	Appliance and accessories may be heavy. To prevent serious injury, always use a sufficient number of trained and experienced workers when moving or leveling appliance and handling accessories.

Stacking and Venting Assembly (2-ASC-4E/STK 208/240V Shown)

Item	Description	Part No.	Qty
1	Riser, flue electric	1004984	1
2	Screw, #10 SMS .5LG	SC-26520	5

NOTE: Actual unit may be different than shown.

After legs or casters have been installed on the bottom oven, place the upper oven on top of lower unit. Align.

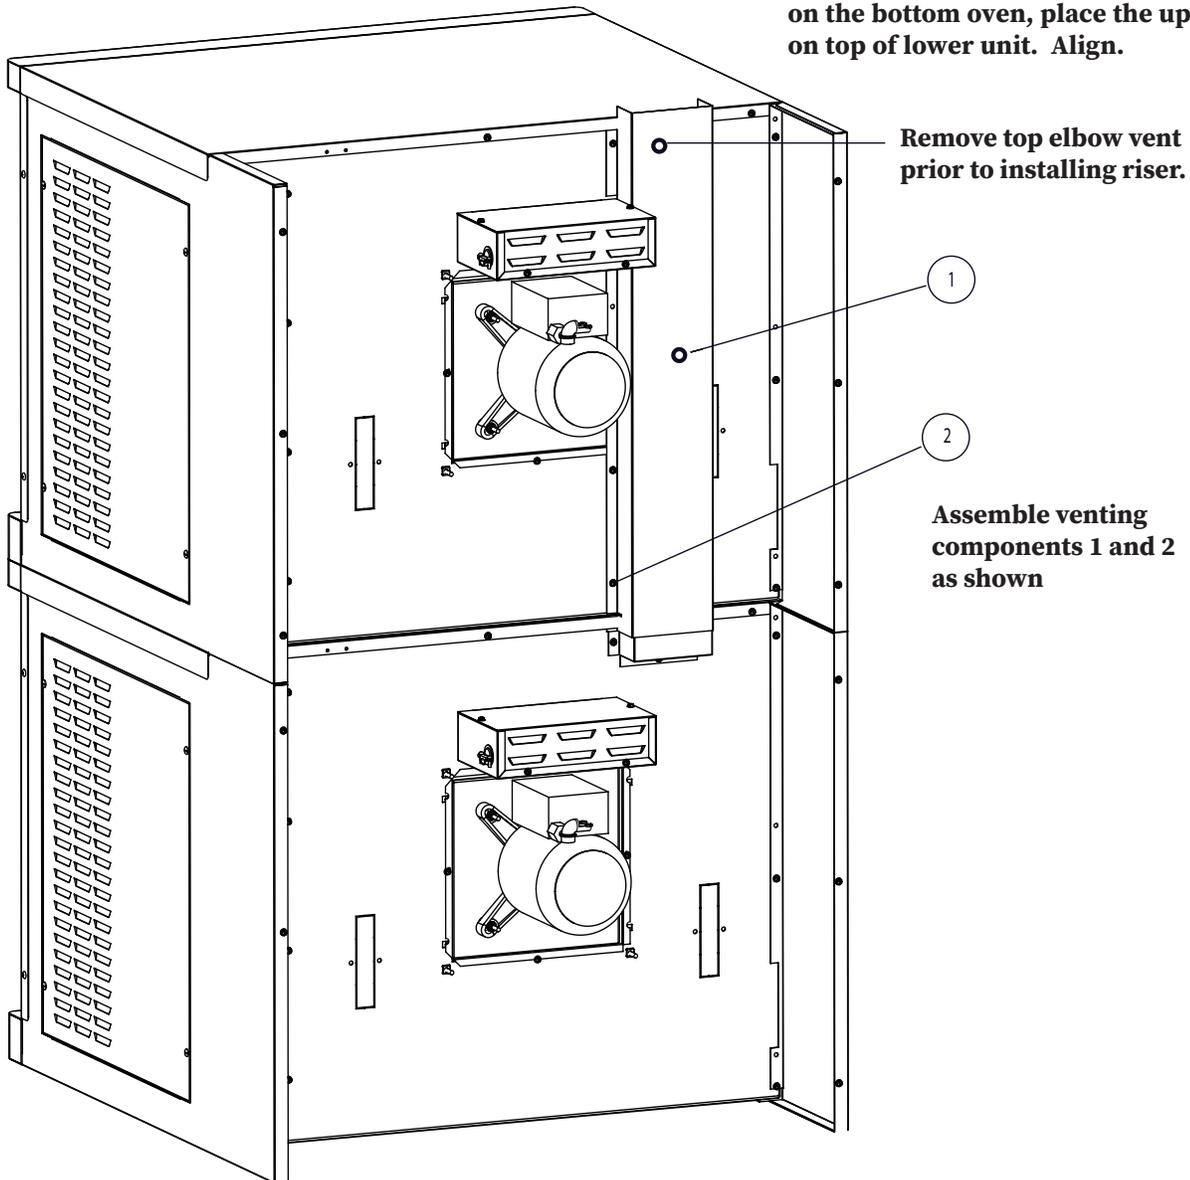

Remove top elbow vent prior to installing riser.

1

2

Assemble venting components 1 and 2 as shown

⚠ CAUTION




Appliance and accessories may be heavy. To prevent serious injury, **always** use a sufficient number of trained and experienced workers when moving or leveling appliance and handling accessories.

Part numbers and drawings are subject to change without notice.

Stacking and Venting

Oven Stand Assembly

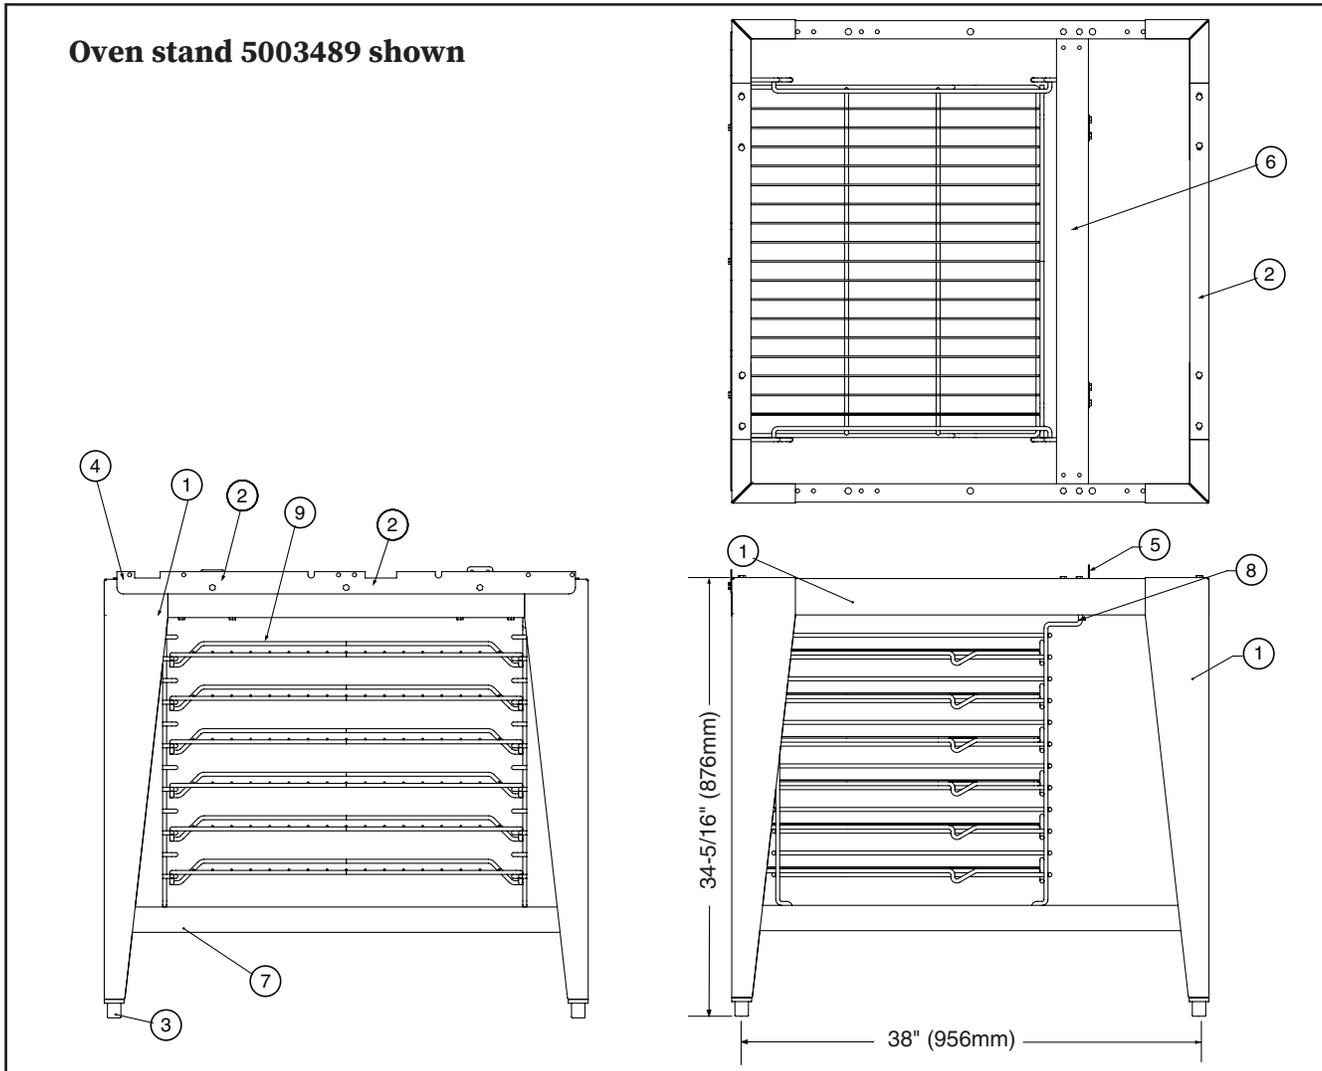

Item	Description	Part No.	Qty
1	Leg Support Assembly	5003488	2
2	Channel, Support	1004459	2
3	Leg	LG-22185	4
*	Casters, Rigid	CS-25674	2
*	Casters, Swivel W/Brake	CS-25675	2
4	Bracket, Stand	1004461	1
5	Bracket, Attachment	1004369	2
6	Channel, Back	1004460	1
7	Shelf, Stand	1004466	1
8	Rack, Oven Support	SR-26551	2
9	Oven Rack	SH-26795	6
10*	Screws, 1/4-20 X 1/2 Hex Head	SC-22729	27
11*	Nut, 1/4-20 Nylon Insert, 18-8 S/S	NU-23984	27
128	Lock Washer, 1/4" Stainless Steel	WS-2294	27

*Not shown

Part numbers and drawings are subject to change without notice.

Start-Up Operation

	CAUTION
	<p>To prevent personal injury or property damage:</p> <p>Always use hand protection when operating this appliance to avoid burns. Metal parts of this equipment become extremely hot when in operation.</p>

This appliance is intended for use in commercial establishments by qualified operating personnel where all operators are familiar with the purpose, limitations, and associated hazards of this appliance. Operating instructions and warnings must be read and understood by all operators and users.

Before initial use:

Interior oven surfaces must be heated to remove surface oils and the accompanying odor produced during the first use of the oven.

1. Wipe all wire shelves, side racks and the full oven interior with a clean, damp cloth.

In the event of a power failure:

- Turn all switches off.
- Wait until power is restored before attempting to operate the oven.

NOTICE: If such an event has occurred, it is strongly recommended that you ensure the food in the oven is safe for consumption according to local health regulations.

2. Close the oven doors, press the power switch to the **ON** position, and set the thermostat to 300°F (149°C).
3. Allow the oven to cycle for approximately 2 hours or until no odor is detected.


Preheating:

Always preheat a cold oven for a minimum of 20 minutes before cooking product. Follow the operating instructions indicated on the next few pages of this manual.

Operation

Pan/Shelf Positions For AAS-2E:

The oven includes 5 chrome plated wire shelves with two removable side racks and 9 shelf positions spaced at 1-5/8" (41mm).

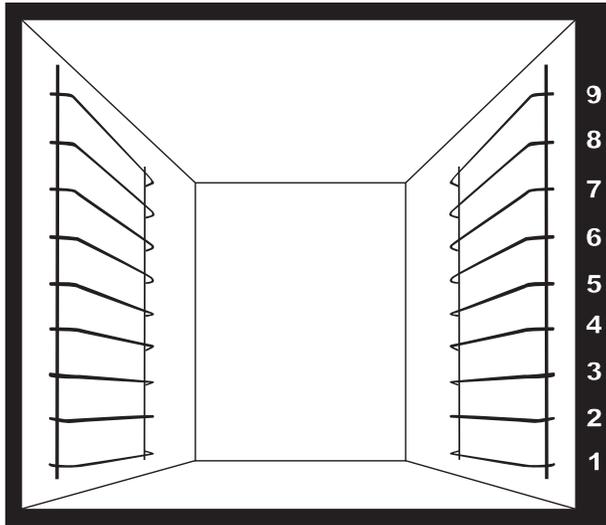



1. **POSITION** The best arrangement for broiling, baking cookies and for other baked goods under 2-1/2" (65mm) in height. This arrangement can also be used as the maximum capacity for reconstituting frozen entrées.
 - 2
 - 4
 - 6
 - 8
2. **POSITION** General baking with the use of sheet pans for products under 3-1/2" (89mm) in height. Products include cakes, pies, muffins, or extended dishes in 20" x 12" x 2-1/2" deep pans (530mm x 325mm x 65mm GN 1/1).
 - 1
 - 4
 - 7
3. **POSITION** Ideal positions for baking bread, meringue, or extended dishes and roasts in pans not to exceed 5-1/2" (140mm) in height.
 - 1
 - 5
4. **POSITION** Arrangement necessary for roasting whole turkey or roasts up to 7" (178mm) in height.
 - 1
 - 6

Pan/Shelf Positions For ASC-4E:

The oven includes 6 chrome plated wire shelves with two removable side racks and 12 shelf positions spaced at 1-3/4" (43mm).

1. **POSITION** The best arrangement for broiling, baking cookies and for other baked goods under 2-1/2" (65mm) in height. This arrangement can also be used as the maximum capacity for reconstituting frozen entrées.
 - 2
 - 4
 - 6
 - 8
 - 12
2. **POSITION** General baking with the use of sheet pans for products under 3-1/2" (89mm) in height. Products include cakes, pies, muffins, or extended dishes in 20" x 12" x 2-1/2" deep pans (530mm x 325mm x 65mm GN 1/1).
 - 1
 - 4
 - 7
 - 10
3. **POSITION** Ideal positions for baking bread, meringue, or extended dishes and roasts in pans not to exceed 5-1/2" (140mm) in height.
 - 1
 - 5
 - 9
4. **POSITION** Arrangement necessary for roasting whole turkey or roasts up to 7" (178mm) in height.
 - 1
 - 6

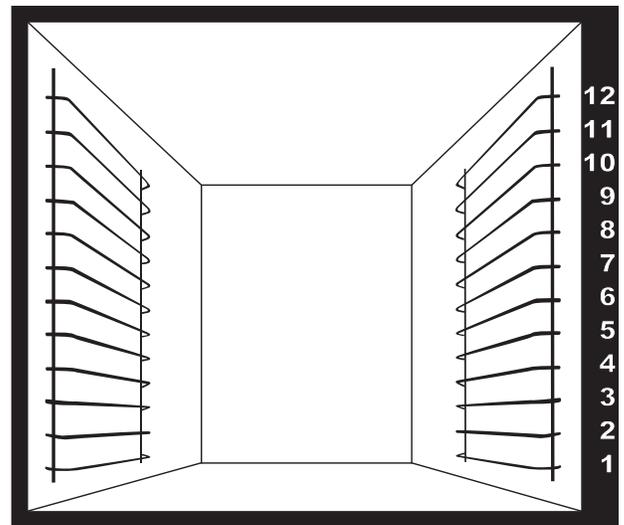

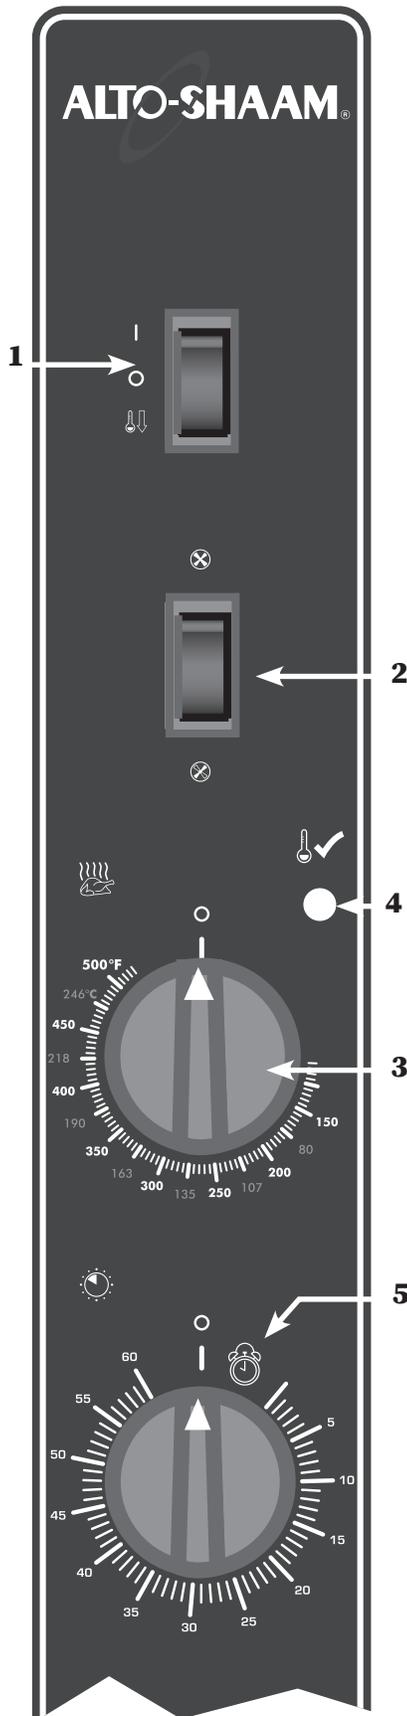

Manual Control Operation

1. Push **Power Switch (1)** to the ON position.
2. Push the **Fan Switch (2)** to the high or low fan speed.
3. Set the **Cook Temperature Thermostat (3)** to the temperature desired.
When this temperature is reached, **Light Off/Oven Ready (4)** indicator light will go out.
4. Load product into the oven.

Allow a minimum of 20 minutes
To preheat a cold oven.

For best results, always load the oven from the bottom to the top position and load as quickly as possible to retain maximum oven compartment heat.

5. Set **Cook Timer (5)** by rotating the knob clockwise past the time required and then back to the desired time.

The timer will begin to count down. When the timer reaches zero, the oven will produce an audible alert signal that will continue for three minutes or until the timer knob is turned counterclockwise to the OFF position.

Cool Down Mode

1. Push **Power Switch (1)** to the Cool Down position.
2. Open the oven doors.

Shut-Down Procedure

1. Push **Power Switch (1)** to the OFF position.

Operation

Chef Operating Tips

The Alto-Shaam convection oven will provide the best results and longest possible service with the utilization of the following suggestions and guidelines.

NOTICE: Moisture will escape around the doors when baking products with a heavy moisture content such as chicken, potatoes, etc. This is a normal operating condition.



1. Thoroughly preheat the oven for approximately 20 minutes before use.
2. As a general rule, the cooking temperature can be set lower than the temperature used in a conventional oven. Cooking time may also be shorter. It is suggested the first batch of each product prepared be monitored closely to check for variances.
3. Maintain a record of the temperatures, times, and load capacities established for products cooked on a regular basis since they will be the same or similar for succeeding loads.
4. When practical, start cooking the lowest temperature products first and gradually work up to products with a higher cooking temperature.
5. If the cooking temperature setting for the previous product is more than 10°F (5°C to 6°C) higher than the temperature needed for the next load, use the Fan Cool-Down feature to decrease the oven temperature before setting the oven to a lower temperature.
6. Work as quickly as possible when loading the oven to prevent heat loss.
7. When the audible signal indicates the time has expired, remove the food product from the oven as quickly as possible to avoid over cooking.
8. Pans should be centered between side racks and each shelf should be loaded evenly to allow proper air circulation within the oven compartment.
9. To ensure even cooking when baking, weigh or measure the product in each pan.
10. **ASC-2E:** When cooking five pans of product, start from the bottom of the oven and use side rack positions 1, 3, 5, 7, and 9.
ASC-4E: When cooking six pans of product, start from the bottom of the oven and use side rack positions 2, 4, 6, 8, 10, and 12.
11. Do not overload the oven. Refer to product/pan capacities indicated in this manual.
12. To obtain an evenly baked product, muffin pans should be placed in the oven with the short side of each pan facing the front of the oven.
13. When rethermalizing frozen casseroles, preheat the oven 100°F (38°C) over the suggested temperature to compensate for the introduction of a large quantity of frozen product into the oven compartment. Reset the thermostat to the correct cooking temperature after the oven is loaded.
14. Use a pan extender or 2" (51mm) deep, 18" x 26" pans for batter-type products that weigh more than 8 lbs (3 to 4 kg), i.e. pineapple upside-down cake.
15. To avoid obstructing airflow that would result in uneven cooking, never place anything directly on the bottom of the oven cavity.

Cooking Guidelines							
Food	Temperature		Time (Minutes)	Food	Temperature		Time (Minutes)
Cakes, Sheet	325°F	163°C	25	Macaroni & Cheese (Frozen, full oven)	350°F	177°C	90
Chicken pieces (30 breasts & thighs, 25 legs & wings)	400°F	204°C	25	Macaroni & Cheese (Refrigerated)	350°F	177°C	30
Chicken halves	400°F	204°C	40	Muffins	325°F	163°C	13-15
Beef patties	400°F	204°C	8	Pies, Frozen	325°F	163°C	40
Bacon	350°F	177°C	16	Pizzas, Individual	325°F	163°C	15
Fish, frozen (5 oz.)	350°F	177°C	15	Potatoes, Baked	350°F	177°C	50
Macaroni & Cheese (Frozen, 1 pan)	350°F	177°C	50	Sandwiches, Grilled Cheese	400°F	204°C	4-6
				Tater tots	450°F	232°C	10

At the end of the day, utilize the cool-down mode and open the oven doors.

Do not place anything directly on the bottom of the oven cavity.

Protecting Stainless Steel Surfaces



It is important to guard against corrosion in the care of stainless steel surfaces. Harsh, corrosive, or inappropriate chemicals can completely destroy the protective surface layer of stainless steel. Abrasive pads, steel wool, or metal implements will abrade surfaces causing damage to this protective coating and will eventually result in areas of corrosion. Even water, particularly hard water that contains high to moderate concentrations of chloride, will cause oxidation and pitting that result in rust and corrosion. In addition, many acidic foods spilled and left to remain on metal surfaces are contributing factors that will corrode surfaces.

Proper cleaning agents, materials, and methods are vital to maintaining the appearance and life of this appliance. Spilled foods should be removed and the area wiped as soon as possible but at the very least, a minimum of once per day. Always thoroughly rinse surfaces after using a cleaning agent and wipe standing water as quickly as possible after rinsing.

Cleaning Agents

Use non-abrasive cleaning products designed for use on stainless steel surfaces. Cleaning agents must be chloride-free compounds and must not contain quaternary salts. Never use hydrochloric acid (muriatic acid) on stainless steel surfaces. Failure to observe this precaution will void the warranty. Always use the proper cleaning agent at the manufacturer's recommended strength. Contact your local cleaning supplier for product recommendations.

Cleaning Materials

Cleaning can usually be accomplished with the proper cleaning agent and a soft, clean cloth. When more aggressive methods are needed, use a non-abrasive scouring pad on difficult areas and make certain to scrub with the visible grain of surface metal to avoid surface scratches. Never use wire brushes, metal scouring pads, or scrapers to remove food residue. Failure to observe this precaution will void the warranty.

NOTICE



To protect stainless steel surfaces, completely avoid the use of abrasive cleaning compounds, chloride based cleaners, or cleaners containing quaternary salts. **Never** use hydrochloric acid (muriatic acid) on stainless steel. **Never** use wire brushes, metal scouring pads or scrapers.

! WARNING



To prevent **serious personal injury, death, or property damage:**

The appliance must be cleaned thoroughly to avoid deposits of grease and or food residue inside the appliance that may catch fire. If fat deposits and/or food waste inside the appliance ignite, shut down the appliance immediately and keep the appliance door closed to extinguish the fire. If further extinguishing is required, disconnect the appliance from the main power and call the fire department. Failure to clean the appliance properly voids the warranty and relieves Alto-Shaam of all liability.

Cleaning and Preventative Maintenance

⚠ WARNING



To prevent serious personal injury, death, or property damage:

Do not steam clean, hose down or flood the interior or exterior with water or liquid solution of any kind. **Do not** use water jet to clean. Failure to observe this precaution will void the warranty.

The oven is fabricated with an easy to clean porcelain enamel interior or an optional stainless steel interior.

NOTICE: Always allow the oven to cool before cleaning. If the oven is hot, allow the interior surfaces to become cool to the touch by opening the oven doors and engaging the cool down function.

Do not use abrasive cleaning compounds.

Completely avoid the use of abrasive cleaning compounds, chloride-based cleaners, or cleaners containing quaternary salts. To protect metal finish on stainless steel, never use hydrochloric acid (muriatic acid).

Clean The Oven On A Daily Basis

1. After the oven has cooled, remove all detachable items such as wire shelves, side racks, and drip pan. Clean these items separately.
2. Remove any food scraps from shelves, shelf supports, and blower fan wheel. Convection baffle openings must be kept clear of food scraps and grease.
3. Wipe the interior metal surfaces of the oven with a paper towel to remove any remaining food debris.
4. Clean interior with a damp cloth or sponge and any good commercial detergent at the recommended strength.
5. For baked-on food deposits, use a non-caustic and non-toxic commercial oven cleaner appropriate for the interior oven surface of your oven. Follow the product manufacturer's instructions carefully for the use of this product. Any commercial oven cleaner must be approved for use on food contact areas. Remove soil with the use of a plastic scouring pad.

⚠ WARNING



To prevent serious injury, death, or property damage, **always** disconnect the appliance from the power source before cleaning or servicing.

6. Wipe door gaskets thoroughly since these areas harbor food debris and grease.
7. Rinse surfaces by wiping with a clean cloth or sponge and clean warm water.
8. Remove excess water with a sponge and wipe dry with a clean cloth or air dry. Leave doors open until interior is completely dry. Replace side racks and shelves.

Always follow appropriate state or local health (hygiene) regulations regarding all applicable cleaning and sanitation requirements for food service equipment.

Exterior

To help maintain the protective film coating on polished stainless steel, clean the exterior of the cabinet with a cleaner recommended for stainless steel surfaces. Spray the cleaning agent on a clean cloth and wipe with the grain of the stainless steel.

Wipe control panel, door vents and door handles, thoroughly since these areas harbor food debris.

Clean exterior glass surfaces with a commercial window cleaner.

Do not use abrasive cleaning compounds

Motor Care

The convection oven motor contains self-lubricating, sealed ball bearings and is generally maintenance-free. During operation, the interior of the motor is cooled by air flowing into the rear of the motor case. This is a general operating feature when proper clearances have been allowed.


At the end of the day, utilize the cool-down mode and open the oven doors.

Trouble	Possible Cause	Remedy
Oven has no power	<ul style="list-style-type: none"> • Insufficient power supply • Defective power cord or plug • Defective power switch. • Loose electrical connection 	<ul style="list-style-type: none"> • Check power source. • Check and replace if necessary. • Check and replace if necessary. • Check all electrical connections
Cook temperature too high/low	<ul style="list-style-type: none"> • Thermostat out of calibration • Defective thermostat 	<ul style="list-style-type: none"> • Check Calibration using a digital thermometer in the center of the cavity. Calibrate if necessary • Replace thermostat
Cook temperature too low	<ul style="list-style-type: none"> • Defective door gasket • Door not closing properly 	<ul style="list-style-type: none"> • Replace Gasket • Check latches on the top and bottom of door.
Fan not running	<ul style="list-style-type: none"> • Door switch defective or out of adjustment • Door switch tripped (2E ONLY) • Door not closing properly • Internal high limit tripped 	<ul style="list-style-type: none"> • Adjust or replace • Reset, Black button should be pushed in • Check latches on the top and bottom of door.
Fan running but no heat	<ul style="list-style-type: none"> • High limit tripped • Defective element (2E & 4E ONLY) • Gas not connected or turned on (4G ONLY) • Centrifugal switch faulty 	<ul style="list-style-type: none"> • Reset high limit and test temperatures • Replace element • Check gas connections and supply
Fan runs with door open	<ul style="list-style-type: none"> • Door switch defective or out of adjustment 	<ul style="list-style-type: none"> • Adjust or replace



Service


Full Assembly - ASC-2E

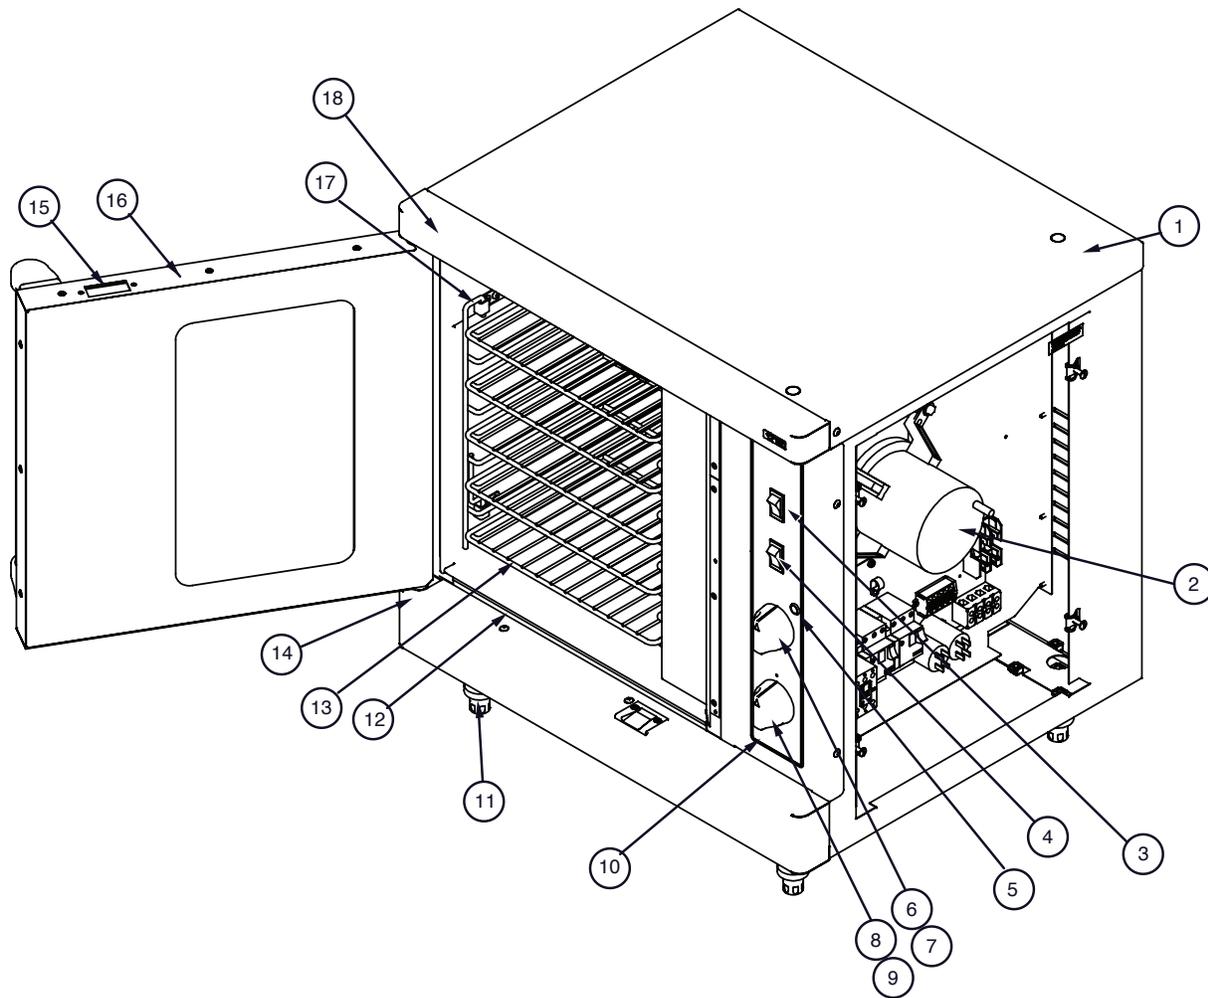

Item	Description	Part No.	Qty	Item	Description	Part No.	Qty
1	Panel, top and side	1005455	1	11	Feet	SEE PG 11	4
2	Motor	MO-34208	1	12	Gasket	Top/Bottom	1005316
3	Switch, on/off/cool down	SW-34112	1			Side	1005311
4	Switch, fan hi/low	SW-34101	1	13	Oven rack		SH-26894
5	Indicator light	LI-3951	1	14	Cover, bottom hinge		1005458
6	Knob, thermostat	KN-34297	1	15	Latch		LT-26976
7	Thermostat	TT-34092*	1	16	Door assembly		DR-27848
8	Knob, timer	KN-34858	1	17	Side rack		SR-26893
9	Timer	TR-34724*	1	18	Cover, top hinge		1005459
10	Panel overlay	PE-26977	1				

*Not shown

Interior Assembly - ASC-2E

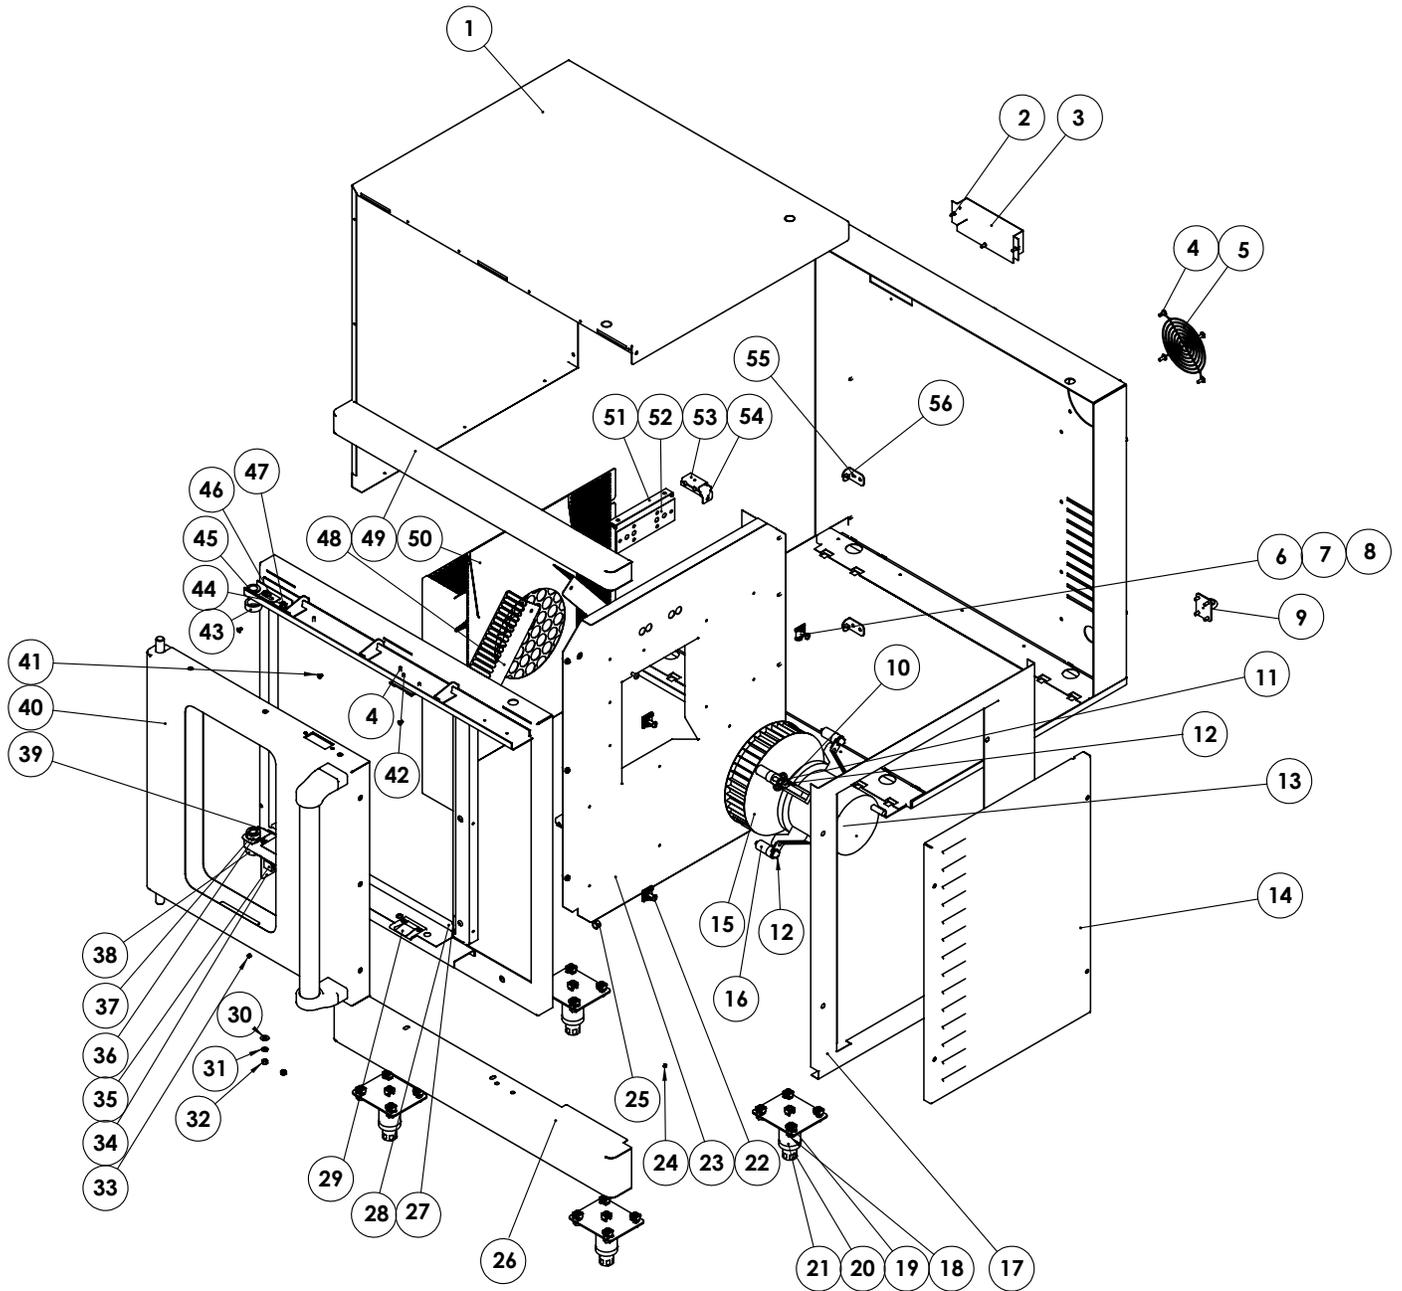


Service

Interior Assembly - ASC-2E

Item	Description	Part No.	Qty	Item	Description	Part No.	Qty
1	Body side, top	1005455	1	29	Door latch ASC-2	LT-26976	2
2	Screw, #10 x 1/2 SMS hex head slotted	SC-26520	25	30	Washer, 1/4", flat, 5/8 OD 18-8	WS-22094	4
3	Vent riser, double stack	1005465	1	31	Lock washer 1/4"	WS-2294	4
4	Screw, 10-32 x 1/2, NF Phil truss M/S, 18-8	SC-2661	19	32	Nut, 1/4-20 nylon insert 18-8	NU-23984	4
5	Fan guard	GD-2396	1	33	Screw, set #10-32 x 0.25 lg	SC-27433	1
6	Stud, CT M6 x 27mm, 1/4 turn	ST-22193	4	34	Bracket, door switch	1005488	1
7	Springs, M6 x 48mm, safety	SD-22194	4	35	Switch, door	SW-34164	1
8	Washers, safety, steel	WS-22195	4	36	Spacer, door	SP-26442	1
9	Bracket, tether	BT-26884	1	37	Spacer, door	1005449	1
10	Screw, 5/16-18 x 2" hex head	SC-22423	4	38	Hinge, door cam switch	HG-27334	1
11	Washer, 5/16" split lock	WS-2867	4	39	Cover, bearing	1006397	1
12	Washer, 5/16" flat	WS-23725	4	40	Door assembly	DR-27848	1
13	Motor, 1/4HP, 1725/1140RPM	MO-34208	1	41	Screw, 10-32 U/C FHMS, 18-8, PH	SC-25004	4
14	Door panel, louver, RH	1006602	1	42	Screw, #10 x 1/2 SMS hex head slotted	SC-23670	25
15	Wheel, blower	WH-26895	1	43	Spacer	SP-27997	1
16	Spacer, motor	SP-26975	4	44	Hinge, plate top universal	1005423	2
17	Panel, side, RH	1005463	1	45	Bushing, 0.63 x 0.63	BU-26433	2
18	Screw, 5/16-18 x 5/8 serr. hex head	SC-2351	16	46	Plate, bushing	1006092	1
19	Nut, 5/16-18 clip	NU-26836	21	47	Screw, 1/4-20 FHSC x 0.75	SC-26587	4
20	Foot, insert adjustment	FE-26125	4	48	Diffuser, air	1006396	2
21	Leg	LG-26123	4	49	Cover, top	1005459	1
22	Clip, holding, M6	CL-22196	4	50	Baffle assembly	5005074	1
23	Cover, insulation	1005461	1	51	Bracket, thermostat	1005478	1
24	Rivet, #42 stainless	RI-2097	8	52	Cover, element	1005460	1
25	Bushing, 1/2" hole	BU-3006	1	53	Retainer, element	1005477	4
26	Cover, bottom	1005458	1	54	Bracket, MTG element	1005349	4
27	Gasket, oven L/R	1005311	2	55	Bracket, MTG baffle	1005310	2
28	Gasket, oven top/bottom	1005316	2	56	Stud, shoulder, short	ST-2546	3

Control Assembly - ASC-2E

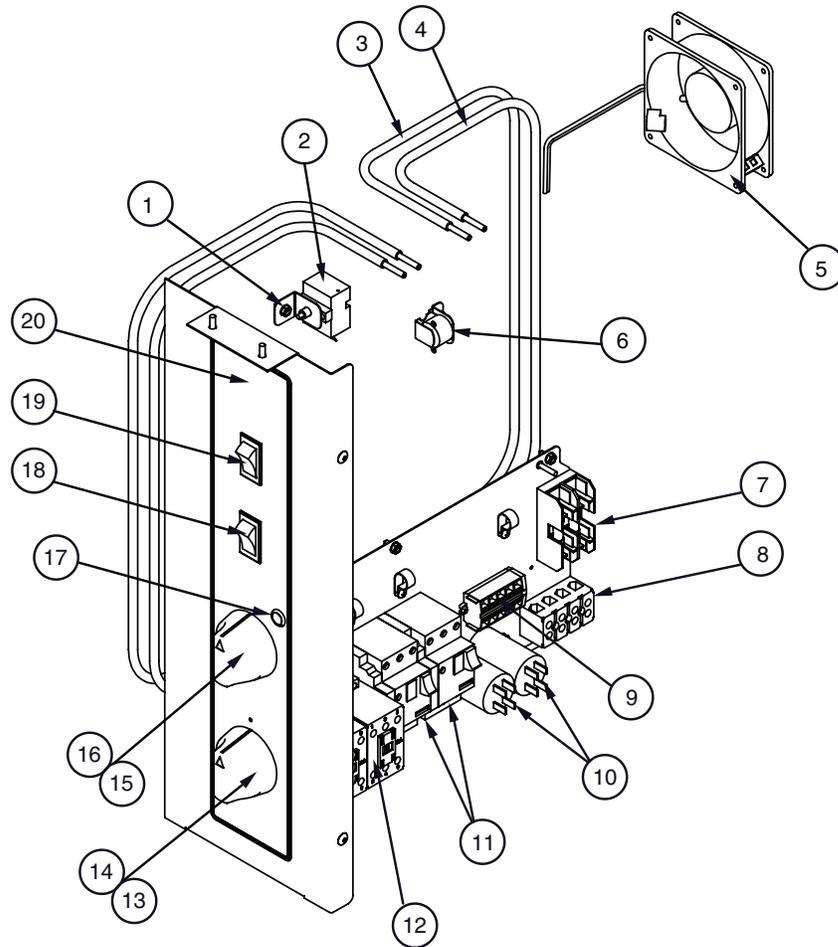


Item	Description	Part No.	Qty	Item	Description	Part No.	Qty	
1	High limit bracket	1012678	1	11	Switch, motor protect	SW-33500	1	
2	Safety thermostat	TT-3750	1	12	Contacteur	CN-3731	1	
3	Heat elements, outer	208V	EL-34211	1	13	Knob, timer	KN-34858	1
		240V	EL-34210	1	14*	Timer	TR-34724	1
4	Heat elements, inner	208V	EL-34212	1	15	Knob, thermostat	KN-34297	1
		240V	EL-34209	1	16*	Thermostat	TT-34092	1
5	Fan, box	70CFM, 230V, 50-60Hz	FA-3568	1	17	Indicator light	LI-3951	1
6	Buzzer		BZ-34113	1	18	Switch, fan hi/low	SW-34101	1
7	Fuse holder		FU-3772	1	19	Switch, on/off/cool down	SW-34112	1
8	Block, terminal		BK-3597	1	20	Panel overlay	PE-26977	1
9	Block, modular		BK-25567	1	21	Fuse, 15 Amp	FU-3775	2
10	10 UF capacitor		CU-34432	2				

*Not shown

Service


Full Assembly - ASC-4E

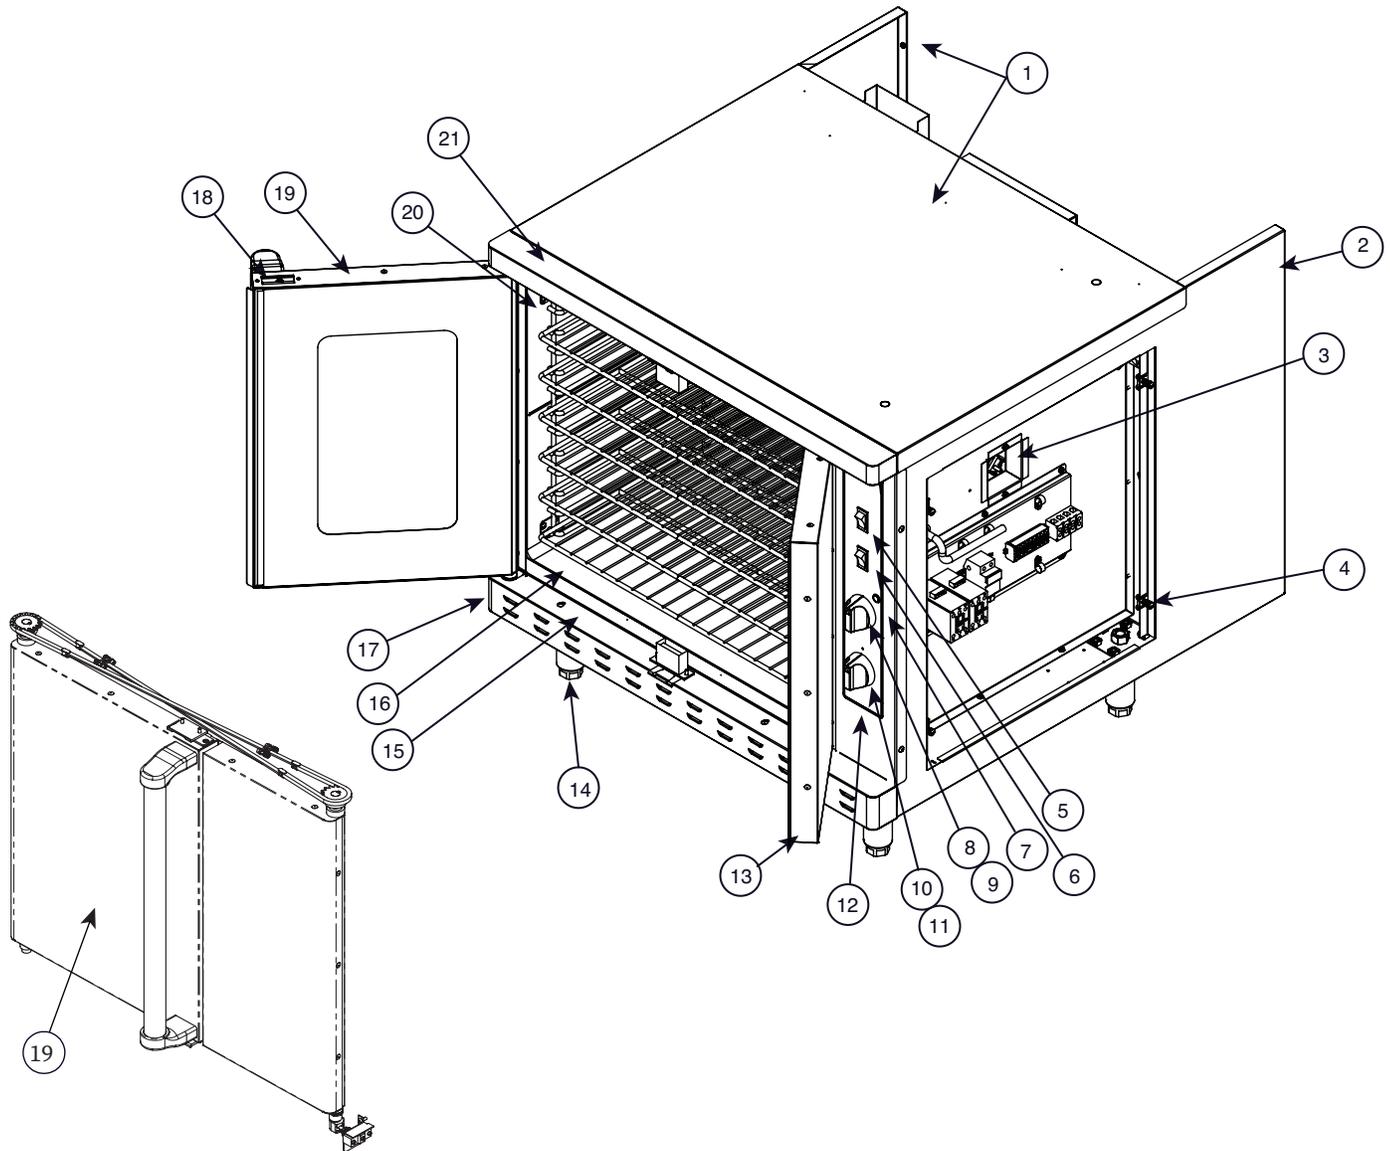

Item	Description	Part No.	Qty	Item	Description	Part No.	Qty
1	Panel outer, top and LH	1006623	1	13	Door assembly, RH	DR-27849	1
2	Panel outer, RH	1006671	1	14	Feet	SEE PG 11	4
3	High limit	SW-34150	1	15	Gasket	Top/bottom	1006606
4	Clip, holding, M6	CL-22196	4	15	Gasket	Side	1000605
5	Switch, on/off cool-down	SW-34112	1	16	Oven rack		SH-26795
6	Switch, fan, hi/lo	SW-34101	1	17	Cover, bottom hinge		1006679
7*	Indicator light	LI-3951	1	18	Latch		LT-26976
8	Thermostat	TT-34092	1	19	Door assembly, LH window		DR-27850
9*	Knob, thermostat	KN-34297	1		Door assembly, LH solid		DR-36068
10	Timer	208-240V TR-34724	1	20	Side rack		SR-26396
		440-480V TR-34174	1	21	Cover, top hinge		1006678
11	Knob, timer	KN-34858	1	22*	Panel, louvered access		1006672
12	Panel overlay	PE-26978	1				

*Not shown

Interior Assembly - ASC-4E

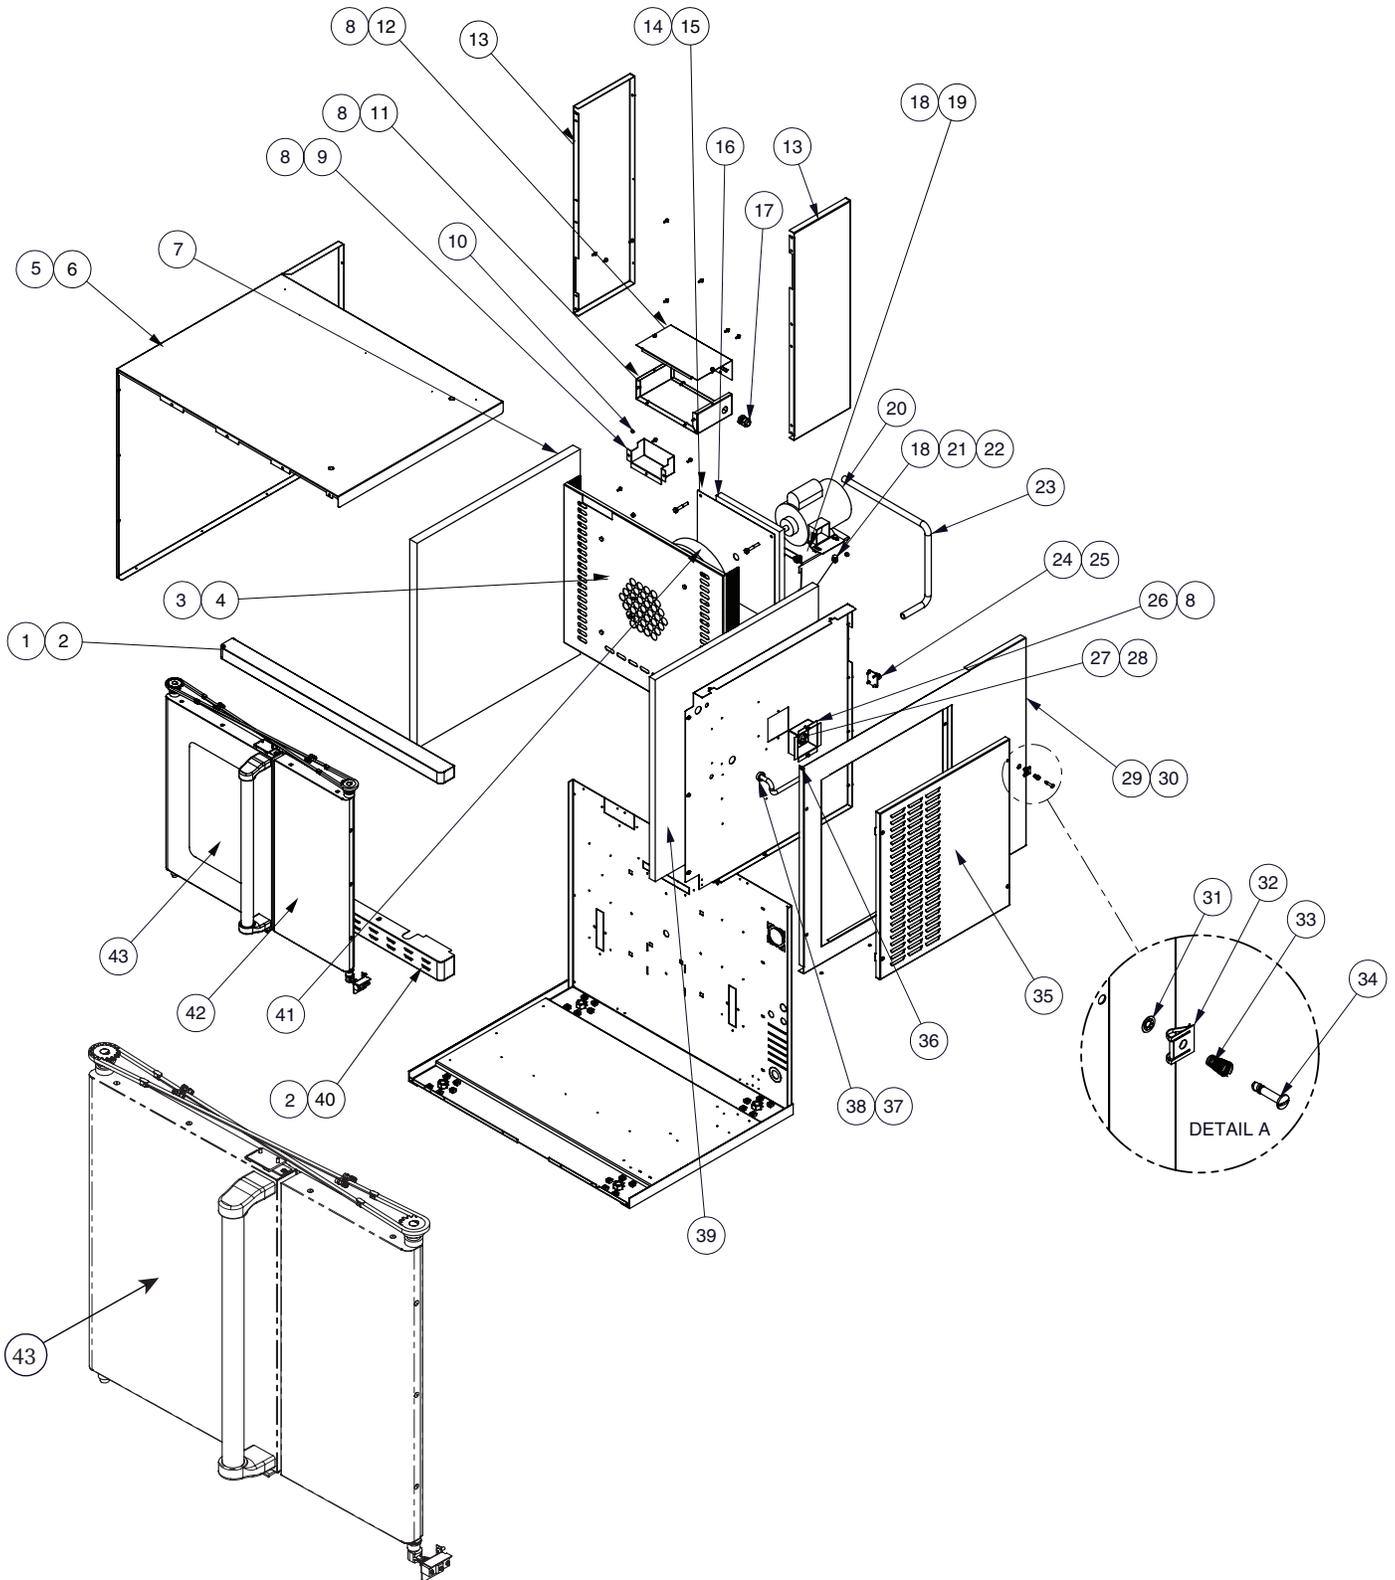

Interior Assembly - Asc-4E



Item	Description	Part No.	Qty
1	Cover, top hinge	1006679	1
2	Screw, 10-32 x 1/2, NF Phil truss M/S, 18-8	SC-2661	4
3	Screw, 1/4-20 x 1/2" hex head	SC-22729	4
4	Baffle assembly	5005222	1
5	Rivet, blind, #44, stainless	RI-2100	7
6	Body, side / top	1006623	1
7	Insulation, 1-1/2" thick 28" x 30.5"	IN-27867	1
8	Screw, #10 x 1/2 SMS hex head slotted	SC-26520	40
9	Moisture vent cover	1004599	1
10	Nut, 10-32, NF hex MS, #18-8	NU-2215	6
11	Element box bottom	1004612	1
12	Element box top	1004606	1
13	Bracket, back stiffener	1007068	2
14	Screw, 5/16-18 x 2" hex head	SC-22423	4
15	Motor cavity plate	1011111	1
16	Insulation, 1" thick 10.875" x 10.875"	IN-27866	1
17	Bushing, straight, strain relief	BU-34606	2
18	Screw, 5/16-18 x 5/8" hex cap	SC-2900	6
19	Motor mount	1009810	1
20	Convection motor	MO-34215	1
21	Washer, lock, 5/16 dia.	WS-2867	6
22	Nut, hex, 5/16-18	NU-2866	4
23	Tube, flexible conduit 3ft	TU-33178	1
24	Bracket, tether	BT-26884	1
25	Screw, 10-32 x 1/2, NF Phil, flat	SC-23670	4
26	Box assembly, high limit	5003658	1
27	Switch, high limit	SW-34150	1
28	Screw 10-32 x 1/4" pan head	SC-26791	8
29	Panel, RH side	1006671	1
30	Rivet, #42 stainless	RI-2097	6
31	Washer, safety, steel	WS-22195	4
32	Clip, holding, M6	CL-22196	4
33	Spring, M6 x 48, safty	SD-22194	4
34	Stud, M6 x 27mm, 1/4 turn	ST-22193	4
35	Panel, access, louvered	1006672	1
36	Rivet, 5/32 dome	RI-26827	1
37	Tubing, conduit 3/8" x 30" long	TU-22256	1
38	Bushing, 1" hole	BU-33619	1
39	Isulation 1" thick 28" x 30"	IN-27866	1
40	Cover, bottom hinge	1006678	1
41	Wheel, blower electric	WH-26405	1
42	Door, RH	DR-27849	1
43	Door, LH window	DR-27850	1
	Door, LH solid	DR-36068	1

*Prior to serial number 870689

Control Assembly - ASC4E

208V, 240V


440V, 480V

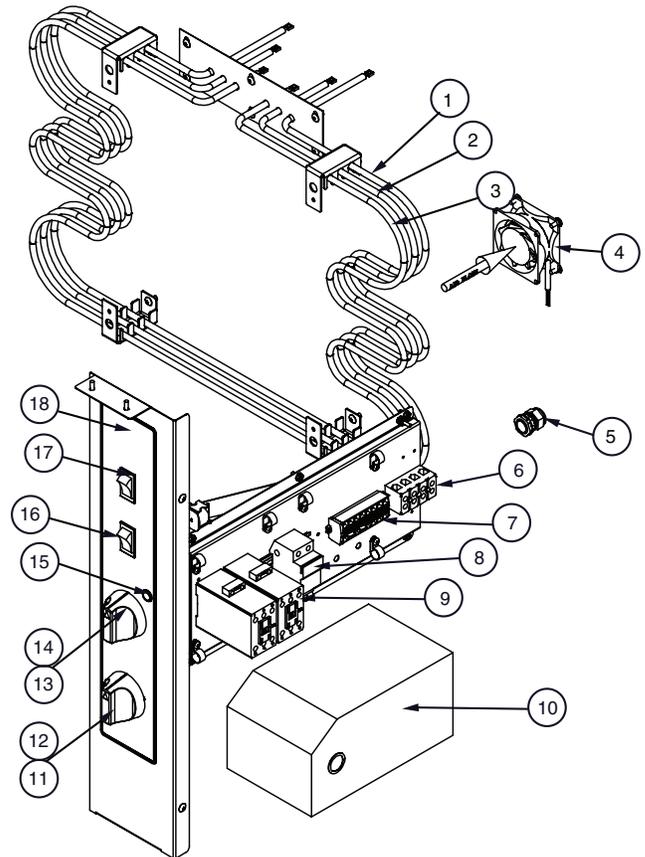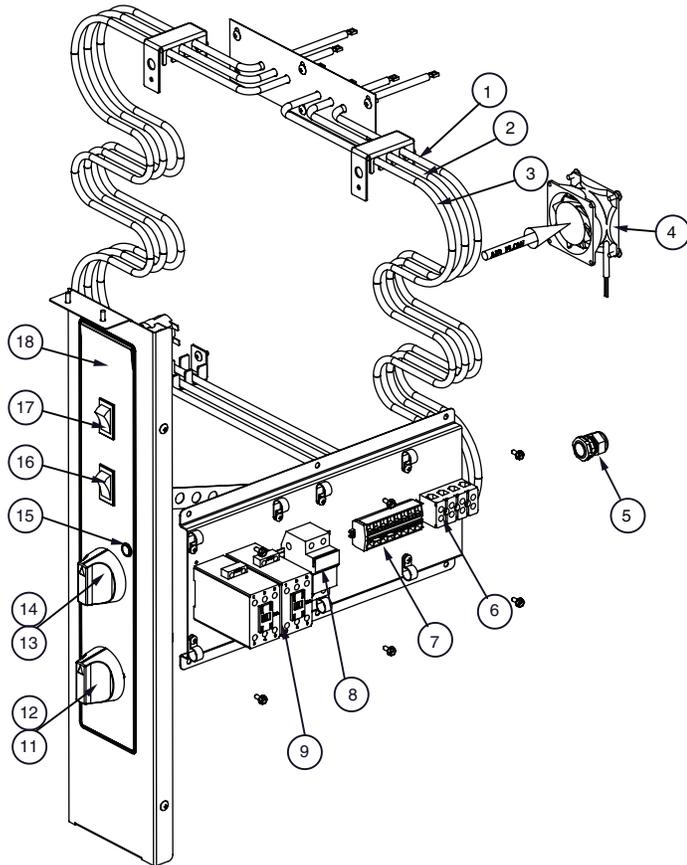

Item	Description	Part No.	Qty	Item	Description	Part No.	Qty		
1	Heat elements, rear	208V	EL-34128	1	8	Fuse holder	FU-34771		
		240V	EL-34125	1					
		480V	EL-34345	1					
2	Heat elements, middle	208V	EL-34127	1	10	Transformer	TN-34421		
		240V	EL-34146	1					
		480V	EL-34346	1					
3	Heat elements, front	208V	EL-34126	1	11	Knob, timer	KN-34858		
		240V	EL-34129	1					
		480V	EL-34347	1					
4	Fan, box	35CFM, 230V, 50-60Hz	FA-3974	1	12*	Timer	208-240V	TR-34724	1
5	Bushing, straight, strain relief		BU-3964	1			440-480V	TR-34174	1
6	Block, terminal		BK-3597	1	13	Knob, thermostat		KN-34297	1
7	Block, modular		BK-34684	1	14*	Thermostat		TT-34092	1
					15	Indicator light		LI-3951	1
					16	Switch, fan, hi/lo		SW-34101	1
					17	Switch, on/off cool-down		SW-34112	1
					18	Panel overlay		PE-26977	1
					19*	Fuse, 15 amp		FU-34772	2

*Not shown

Door Package - ASC-4E

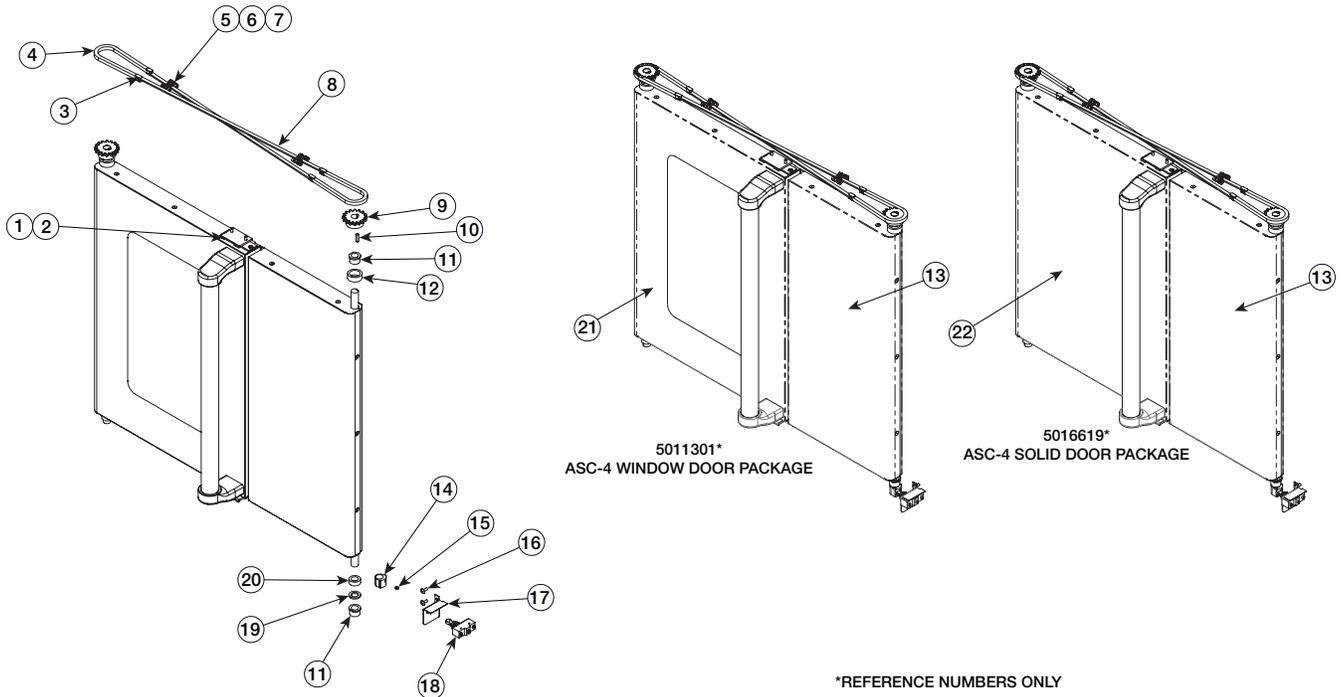


*REFERENCE NUMBERS ONLY

ITEM	DESCRIPTION	PART NO.	5011301/QTY	5016619/QTY
1	SCREW, 10-32 X 1/2, NF PHIL, FLAT	SC-23670	8	8
2	ROLLER LATCH WITH STRIKE	LT-26976	2	2
3	CHAIN, MASTER LINK	CH-26622	4	4
4	CHAIN, DOOR DRIVE	CH-26623	2	2
5	LINKAGE ASSY, SHORT	5003667	2	2
6	SCREW, #10-32 X 0.75 SHC	SC-26704	4	4
7	NUT, 10-32 UNF HEX MS, 18-8 SST	NU-2215	8	8
8	LINKAGE ASSY, LONG	5003666	2	2
9	SPROCKET, 0.625" BORE, 35 BS 16T	SO-26620	2	2
10	BLOCK, KEY SPROCKET	BK-26625	2	2
11	BUSHING, 0.63 X 0.63	BU-26433	4	4
12	SPACER	SP-27997	2	2
13	DOOR ASSY, RH	DR-27849	1	1
14	HINGE, DOOR CAM SWITCH	HG-27334	1	1
15	SCREW, SET #10-32 X 0.25 LG	SC-27433	1	1
16	SCREW, 10-32 X 1/2, NF PHIL TRUSS M/S, 18-8 S/S	SC-2661	2	2
17	BRACKET, DOOR SWITCH	1006712	1	1
18	SWITCH, DOOR ROLLER	SW-34164	1	1
19	SPACER, DOOR	1005449	2	2
20	SPACER, DOOR	SP-26442	2	2
21	DOOR, WINDOW LH ASSEMBLY	DR-27850	1	-
22	DOOR, SOLID LH ASSEMBLY	DR-36068	-	1

PART #	DESCRIPTION	REVISION
5011301	ASC-4 WINDOW DOOR PACKAGE	1
5016619	ASC-4 SOLID DOOR PACKAGE	1

Door Mechanism - ASC-4E

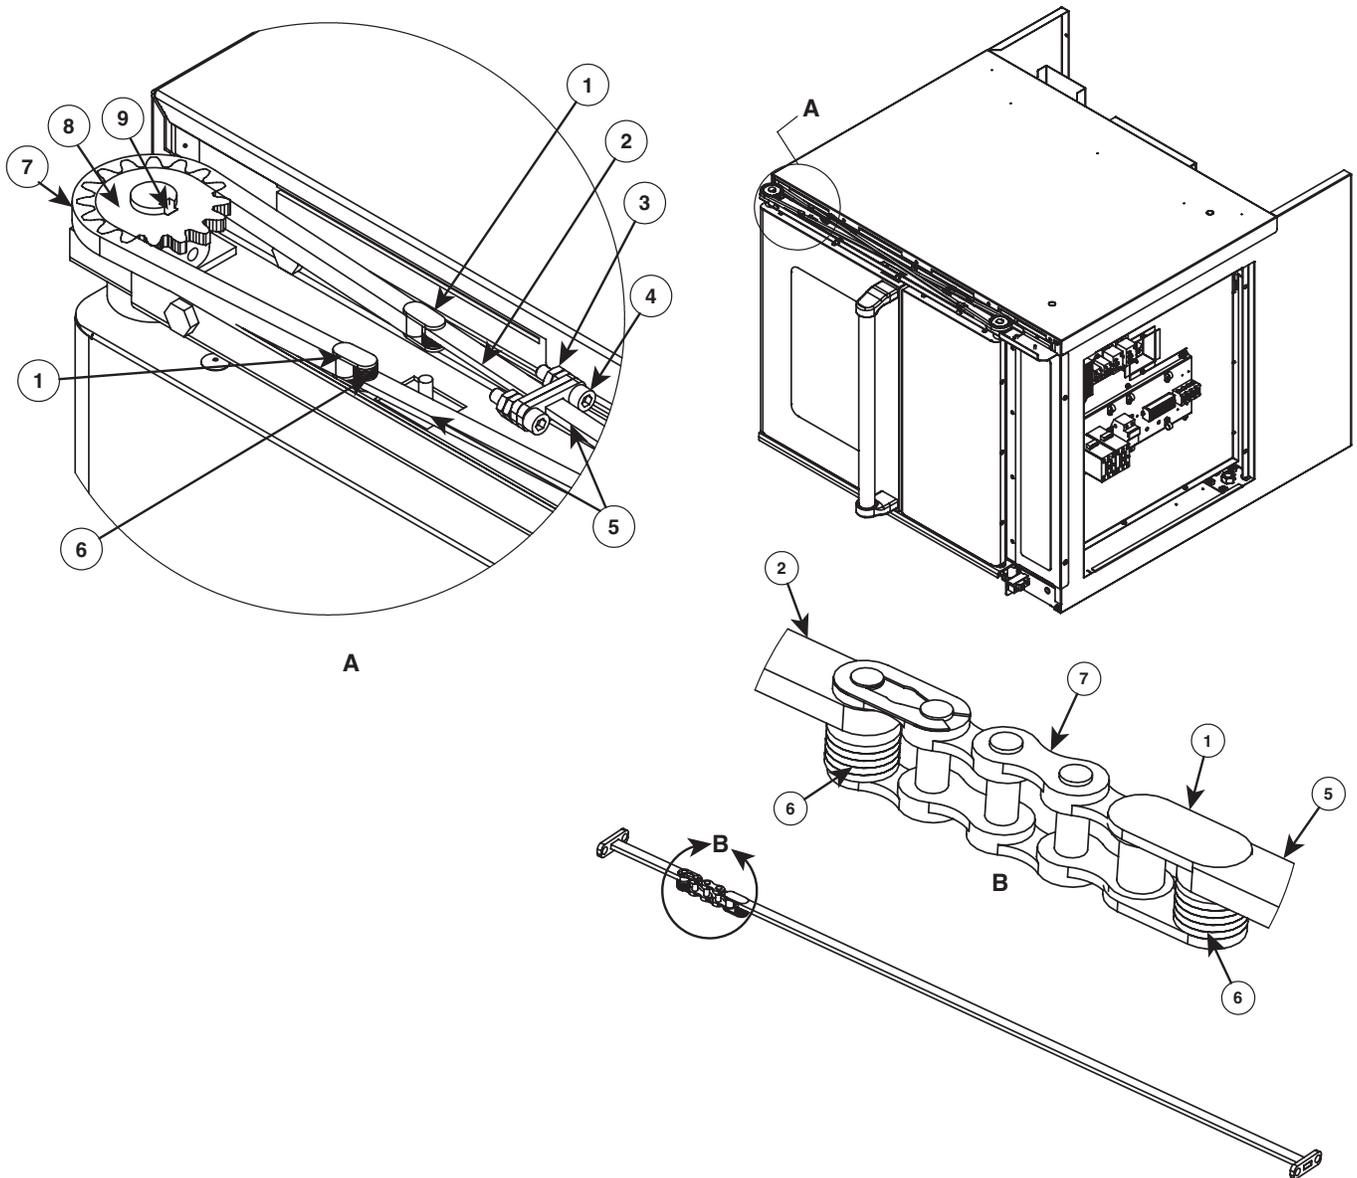


Item	Description	Part No.	Qty
1	Chain, master link	CH-26622	4
2	Linkage assembly, short	5003667	2
3	Nut, 10-32 UNF hex MS, 18-8 SST	NU-2215	8
4	Screw, 10-32 x 0.75 SCH	SC-26704	4
5	Linkage assembly, long	5003666	2
6	Washer, 6-32, flat, nylon	WS-23148	20
7	Chain, door drive	CH-26623	2
8	Sprocket, door	SO-26620	2
9	Block, key sprocket	BK-26625	2


*Not shown

Service

Door Hardware - ASC-4E

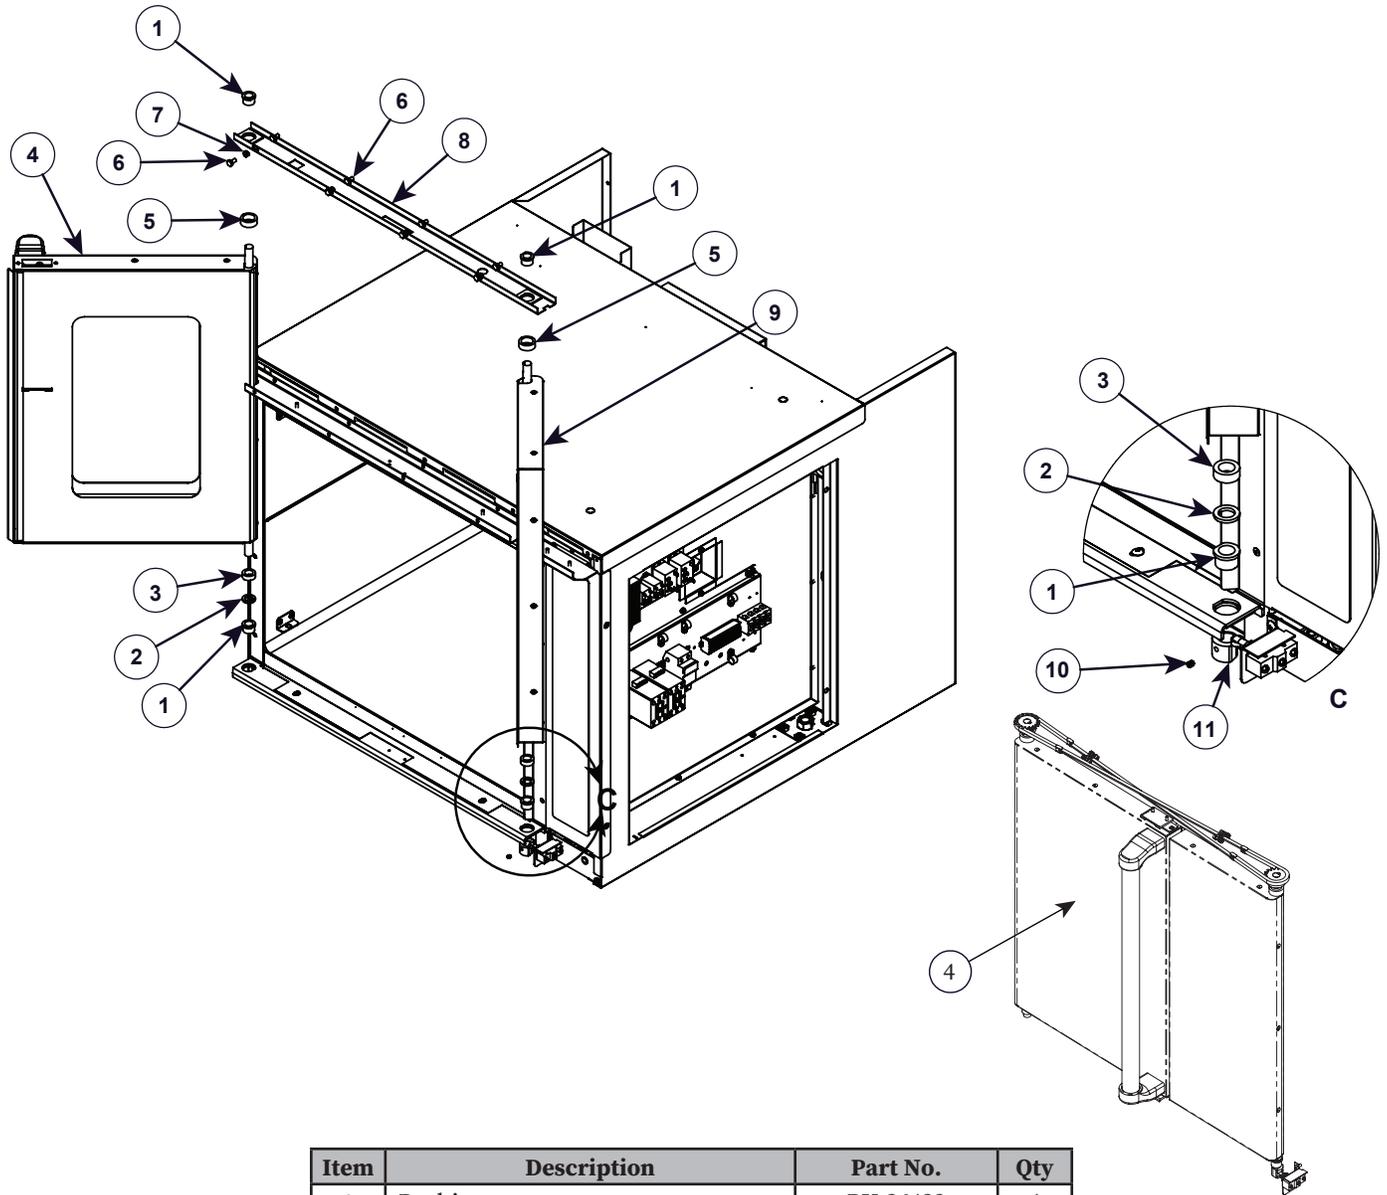


Item	Description	Part No.	Qty
1	Bushing	BU-26433	4
2	Spacer, door	1005449	2
3	Spacer, door	SP-26442	2
4	Door assembly, LH window	DR-27850	1
	Door assembly, LH solid	DR-36068	1
5	Spacer	SP-27997	2
6	Screw, 1/4-20 x 1/2" hex head	SC-22729	8
7	Nut, 1-4-20 nylon insert 18-8 S/S	NU-23984	4
8	Top plate assembly	5005404	1
9	Door assembly, RH	DR-27849	1
10	Screw, est 10-32 x 0.25 LG	SC-27433	1
11	Hinge, door cam switch	HG-27334	1

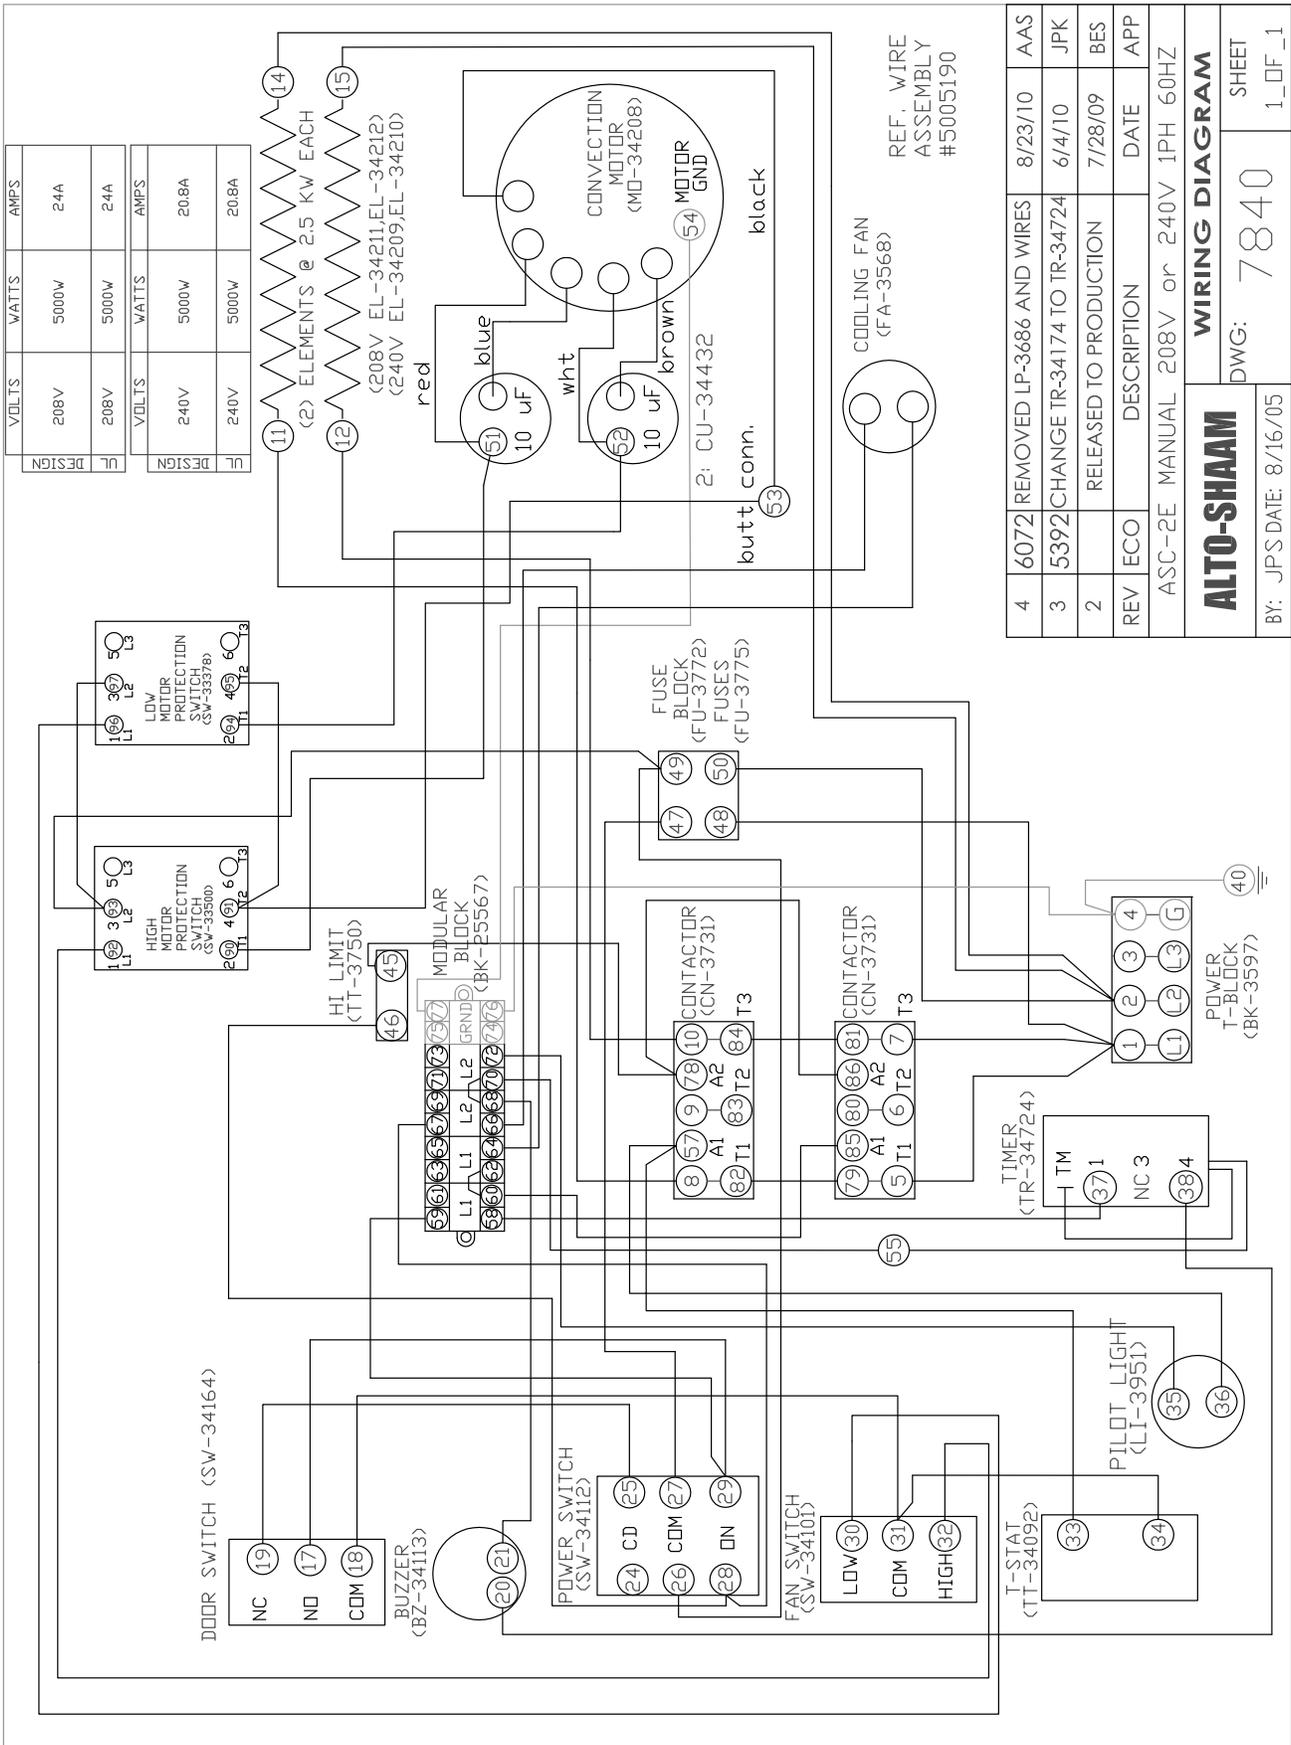


REV	ECO	DESCRIPTION	DATE	APP
4	6072	REMOVED LP-3686 AND WIRES	8/23/10	AAS
3	5392	CHANGE TR-34174 TO TR-34724	6/4/10	JPK
2		RELEASED TO PRODUCTION	7/28/09	BES

ASC-2E MANUAL 208V or 240V 1PH 60HZ

ALTO-SHAAM		WIRING DIAGRAM	
BY: JPS DATE: 8/16/05	DWG: 7840	SHEET	1_DF_1

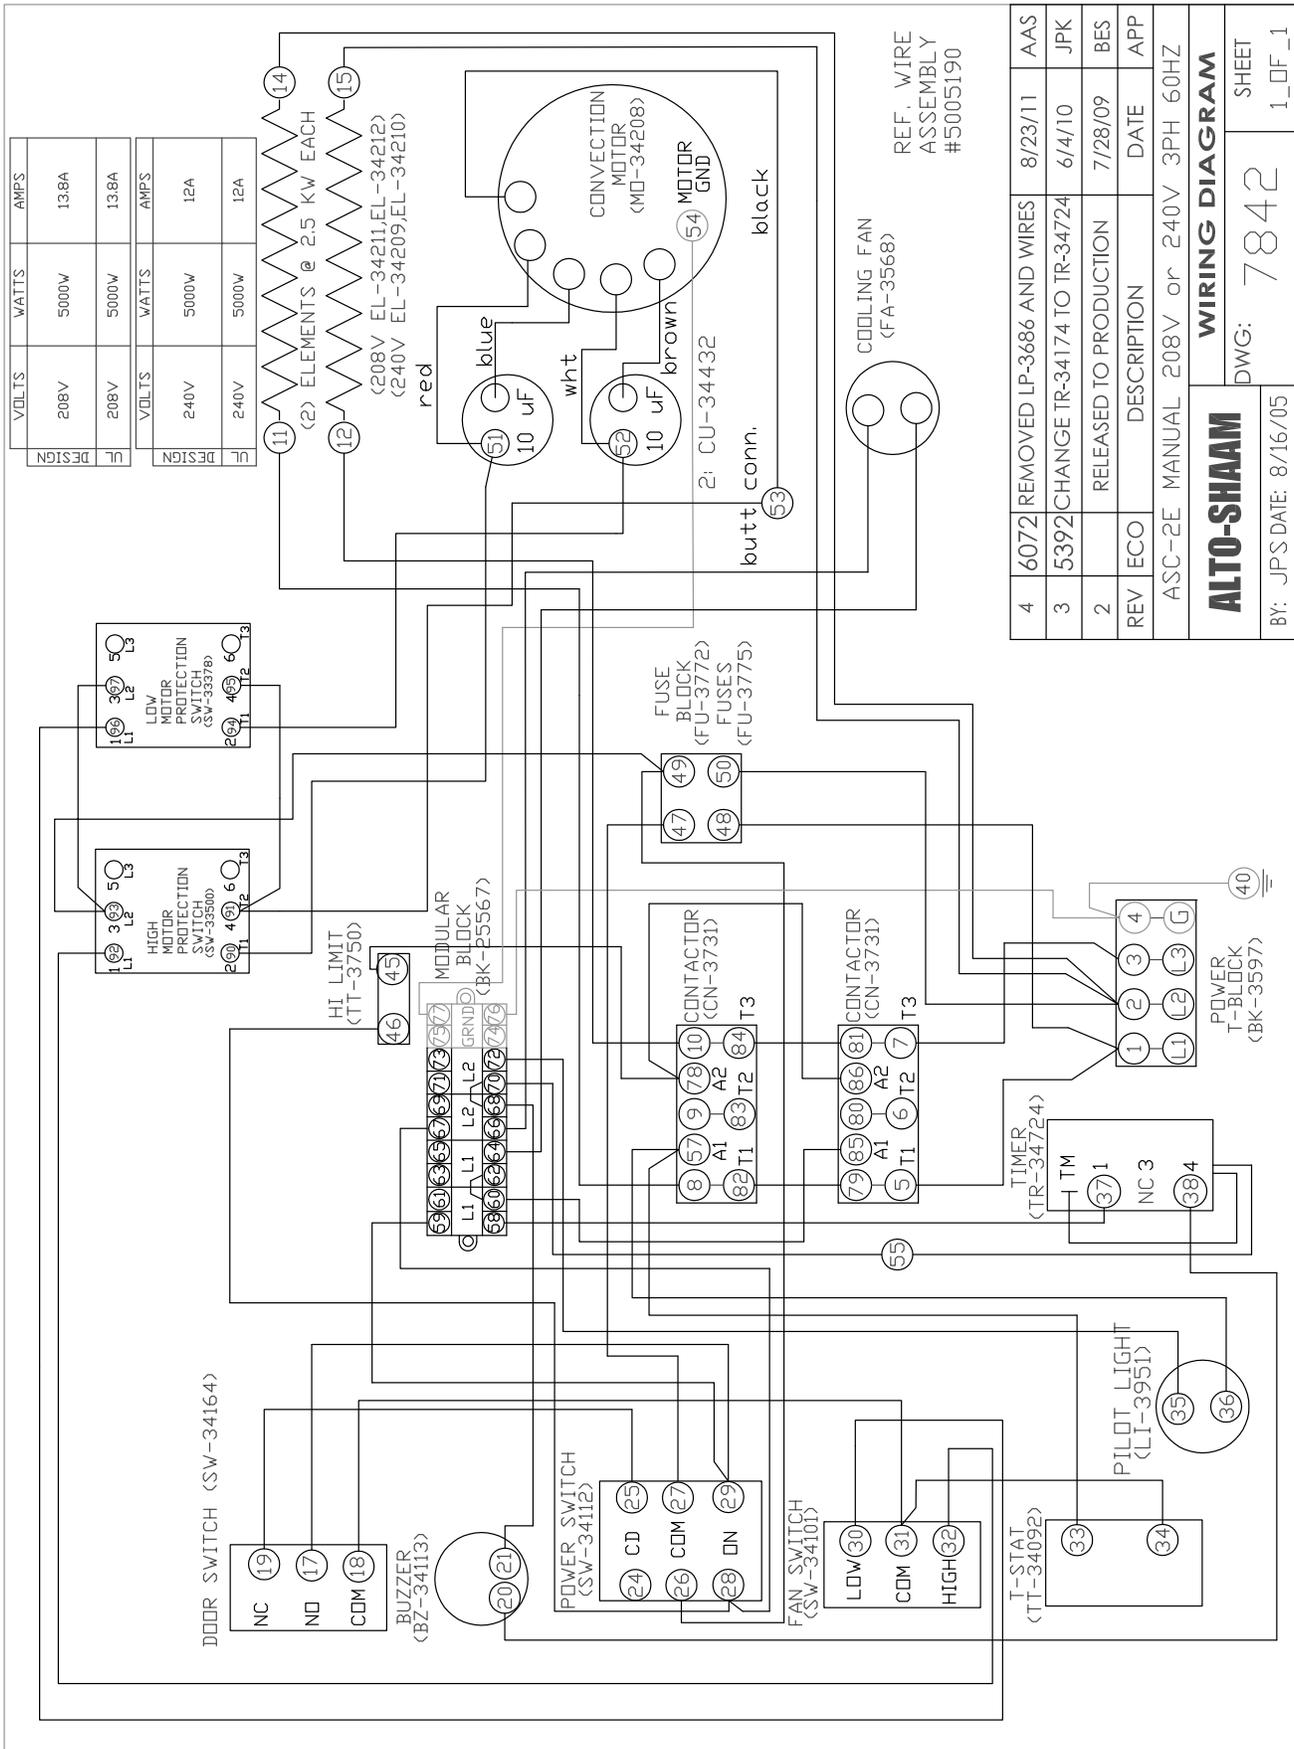


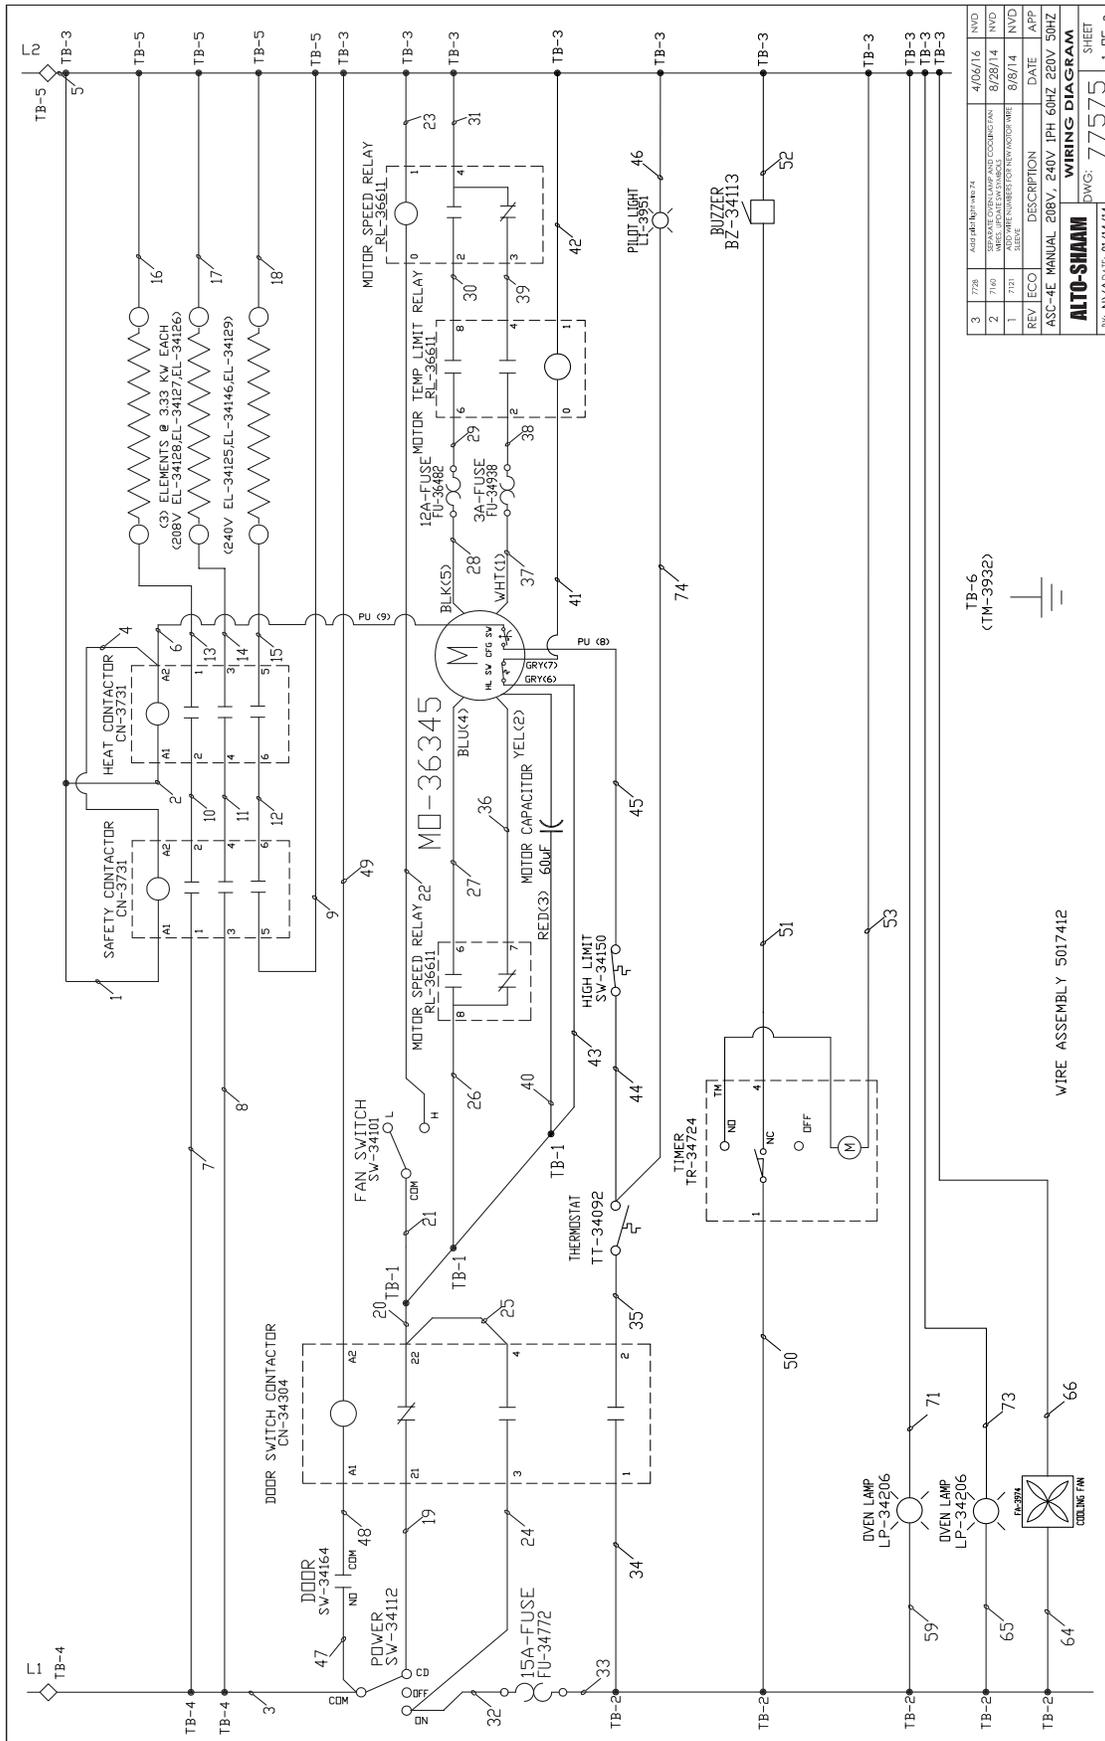


3	728	ASG/ASH/ASH-24	4/06/16	NVD
2	769	UPGRADE/CONVERSION/CONNECTIONS	8/28/14	NVD
1	721	WIRE NUMBER FOR NEW/OLD WIRE	8/8/14	NVD
REV	ECCO	DESCRIPTION	DATE	APP
ASC-4E MANUAL 200V, 240V 1PH 60HZ 200V 50HZ				
ALTO-SHAAM		WIRING DIAGRAM		
BY: NVAD/AE 01/14/14		DWG: 77575	SHEET 1 OF 2	



WIRE ASSEMBLY 5017412

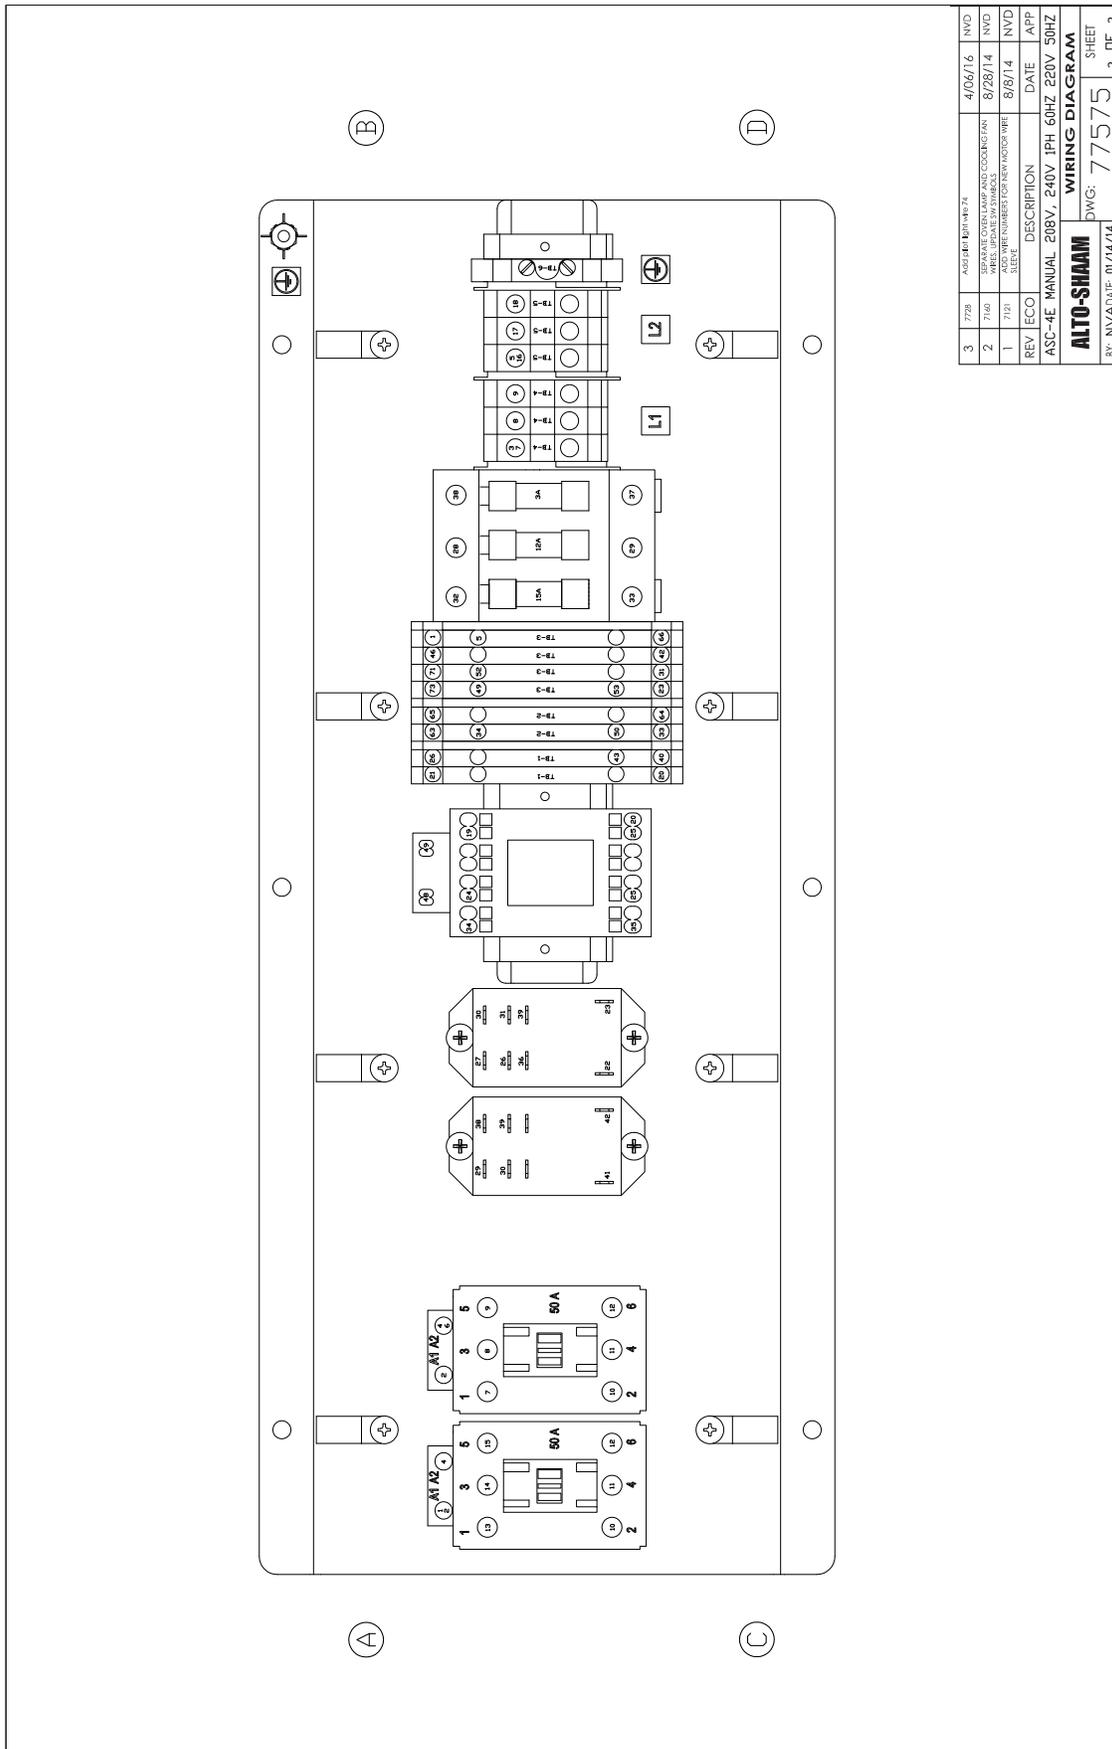

3	7728	ADD LABELS TO WIRING	4/06/16	NVD
2	7166	SEPARATE OVEN LAMP AND COOKING FAN	8/28/14	NVD
1	7153	ADD WIRE NUMBERS FOR NEW MOTOR WIRE SLEEVE	8/8/14	NVD
REV	ECO	DESCRIPTION	DATE	APP
ASC-4E MANUAL 208V, 240V 1PH 60HZ 220V 50HZ				
ALTO-SHAAM			WIRING DIAGRAM	
BY: INVADATE: 01/14/14			DWG: 77575	
			SHEET 2_DF-2	

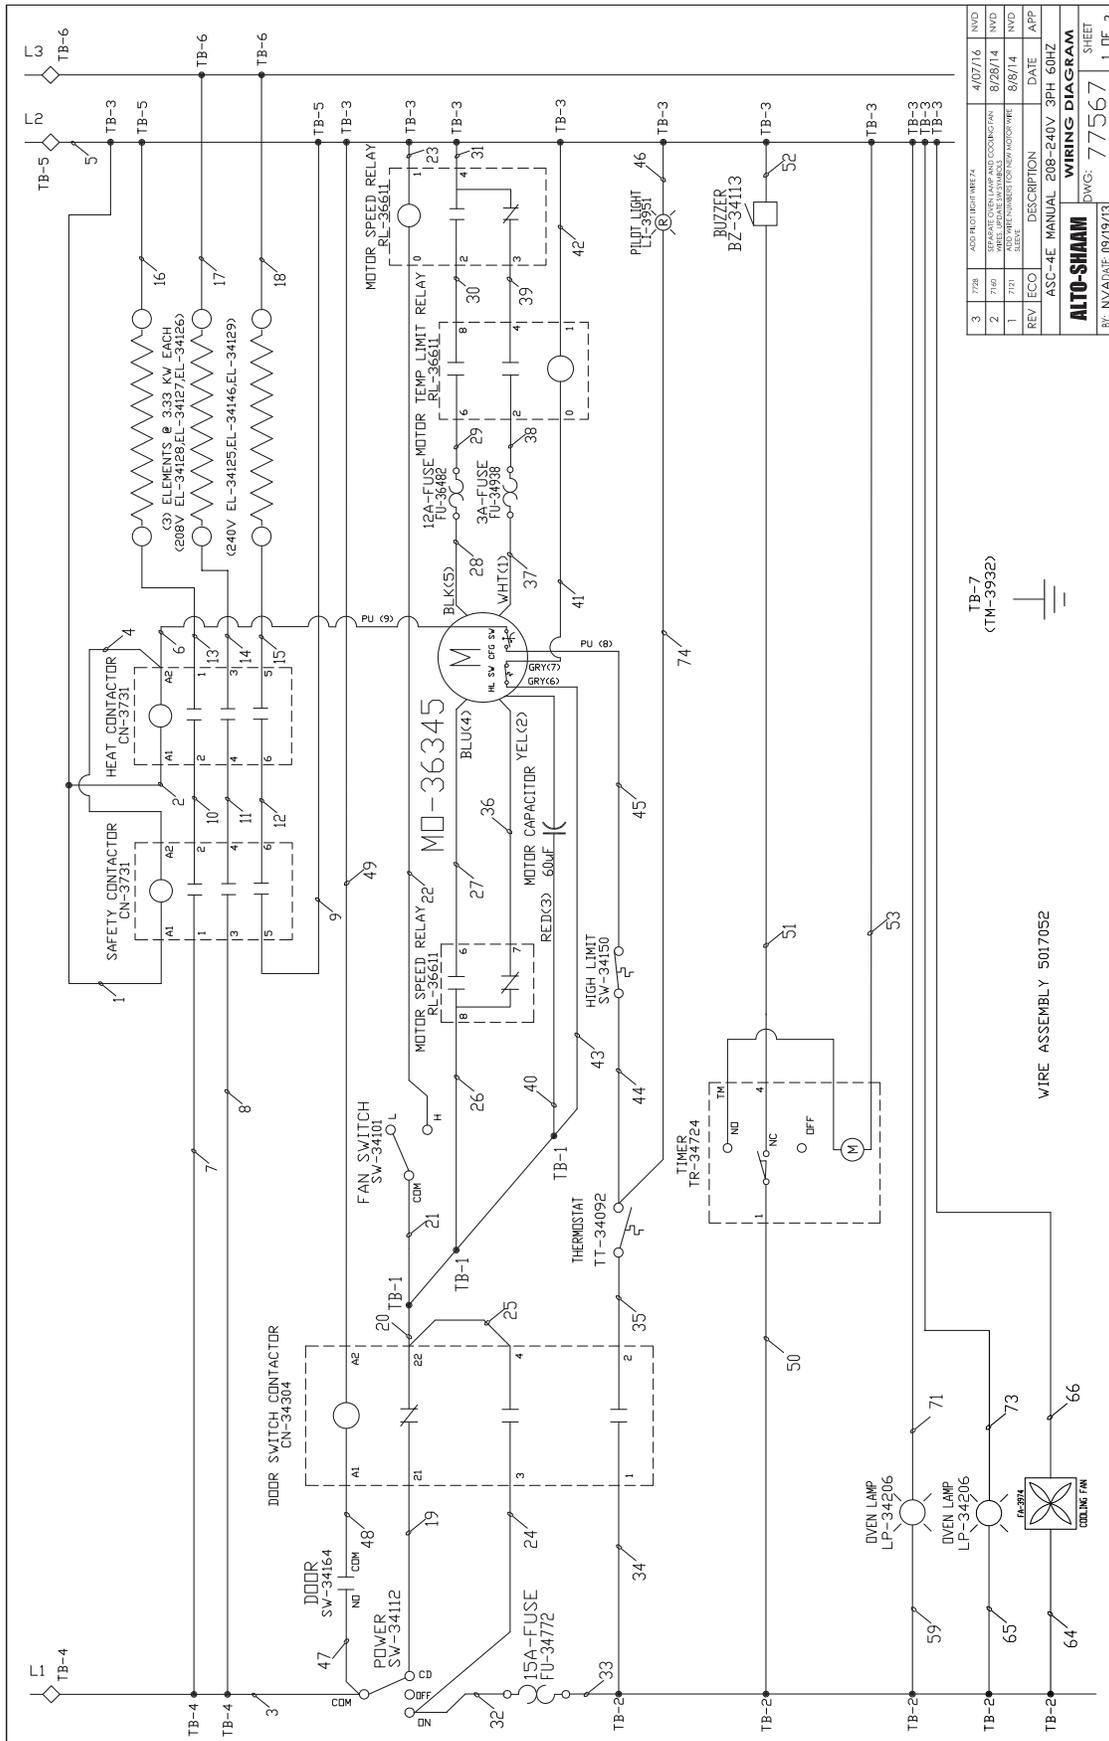


3	729	ADD FAN MOTOR WIRE	4/07/16	NVD
2	729	REPLACE CONTACT AND COORDINATE	8/28/14	NVD
1	727	WIRE UP MAIN SYSTEM	8/8/14	NVD
REV	ECO	DESCRIPTION	DATE	APP
ASC-4E MANUAL 208-240V 3PH 60HZ				


ALTO-SHAAM		WIRING DIAGRAM	
BY: NVA/DRE 09/19/13	DWG: 77567	SHEET	1 OF 2



WIRE ASSEMBLY 5017052

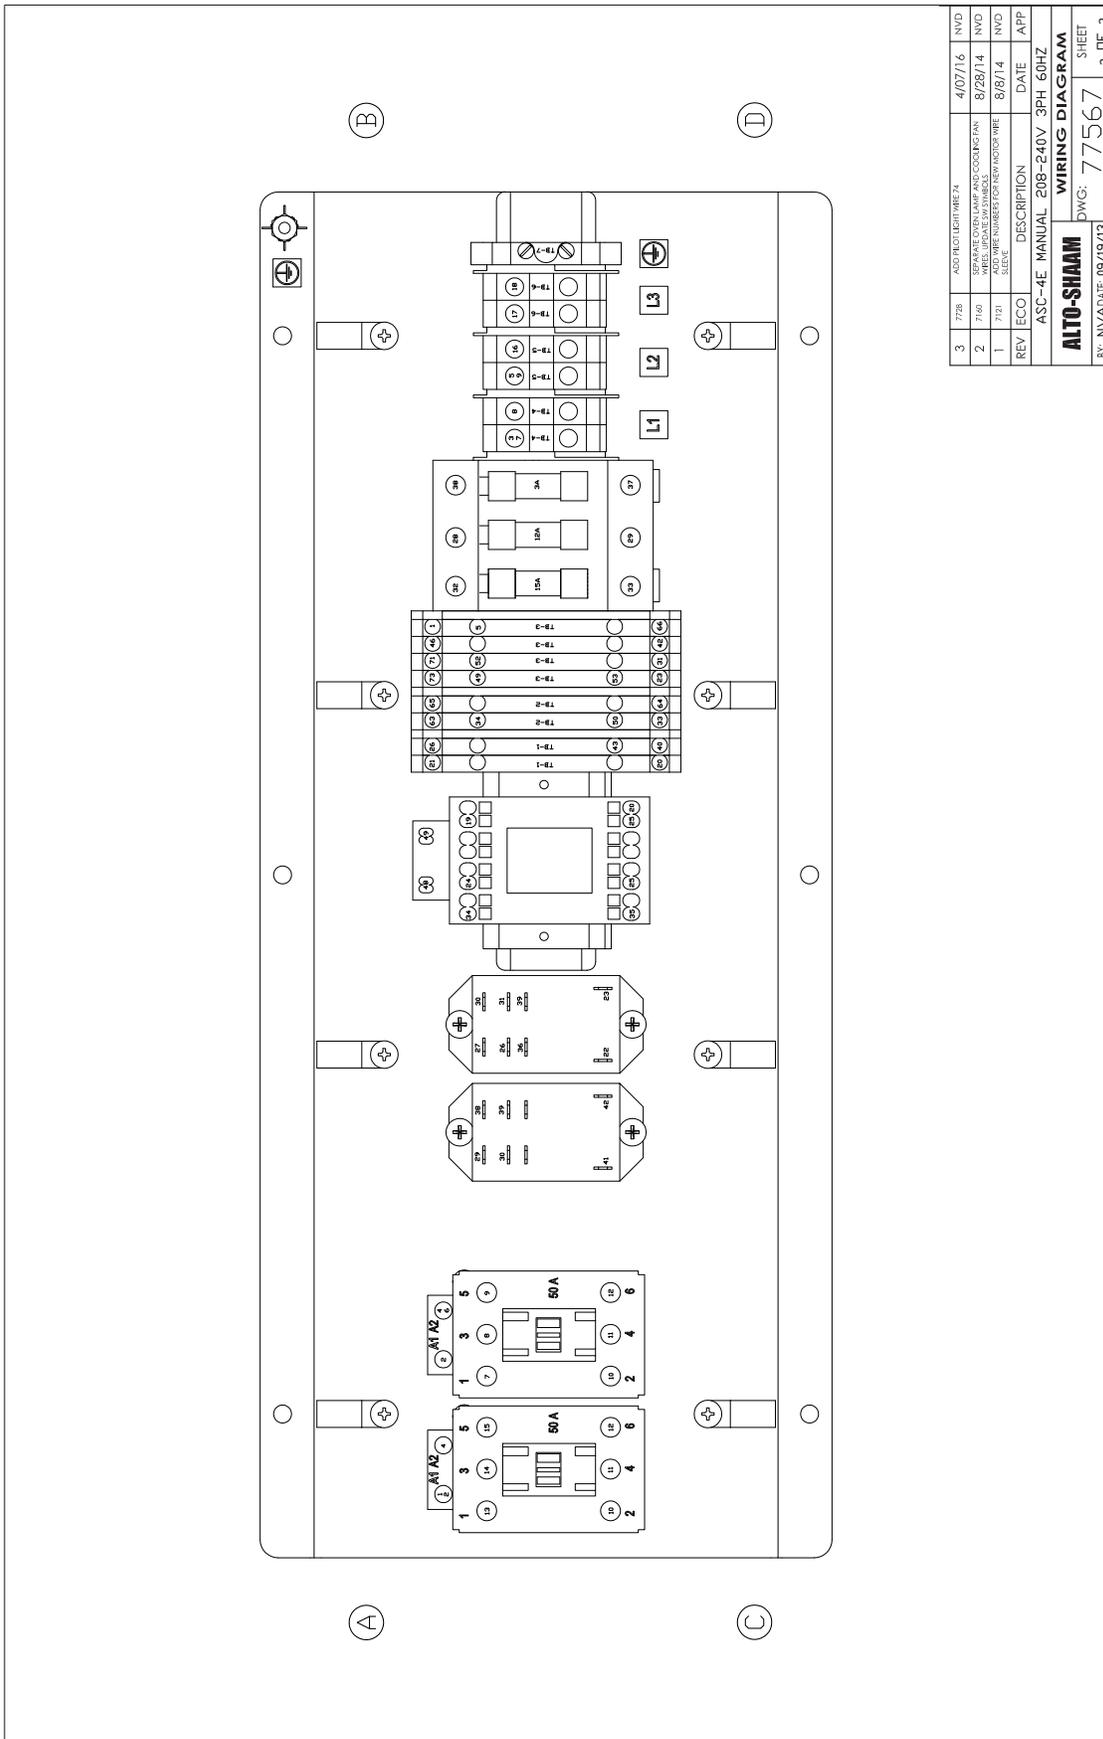

3	7726	630 FROST LIGHT WIRE 74	4/07/16	NVD
2	7169	WIRE FOR NEW COOKING PAN WIRE, UPON THE EXTERNAL WIRE, UPON THE EXTERNAL	8/28/14	NVD
1	7171	ADD WIRE NUMBER FOR NEW MOTOR WIRE	8/18/14	NVD
REV	ECO	DESCRIPTION	DATE	APP
ASC-4E		MANUAL 208-240V 3PH 60HZ		
ALTO-SHAAM		WIRING DIAGRAM		
BY: INVADATE: 09/19/13		DWG: 77567		
		SHEET		
		2 OF 2		

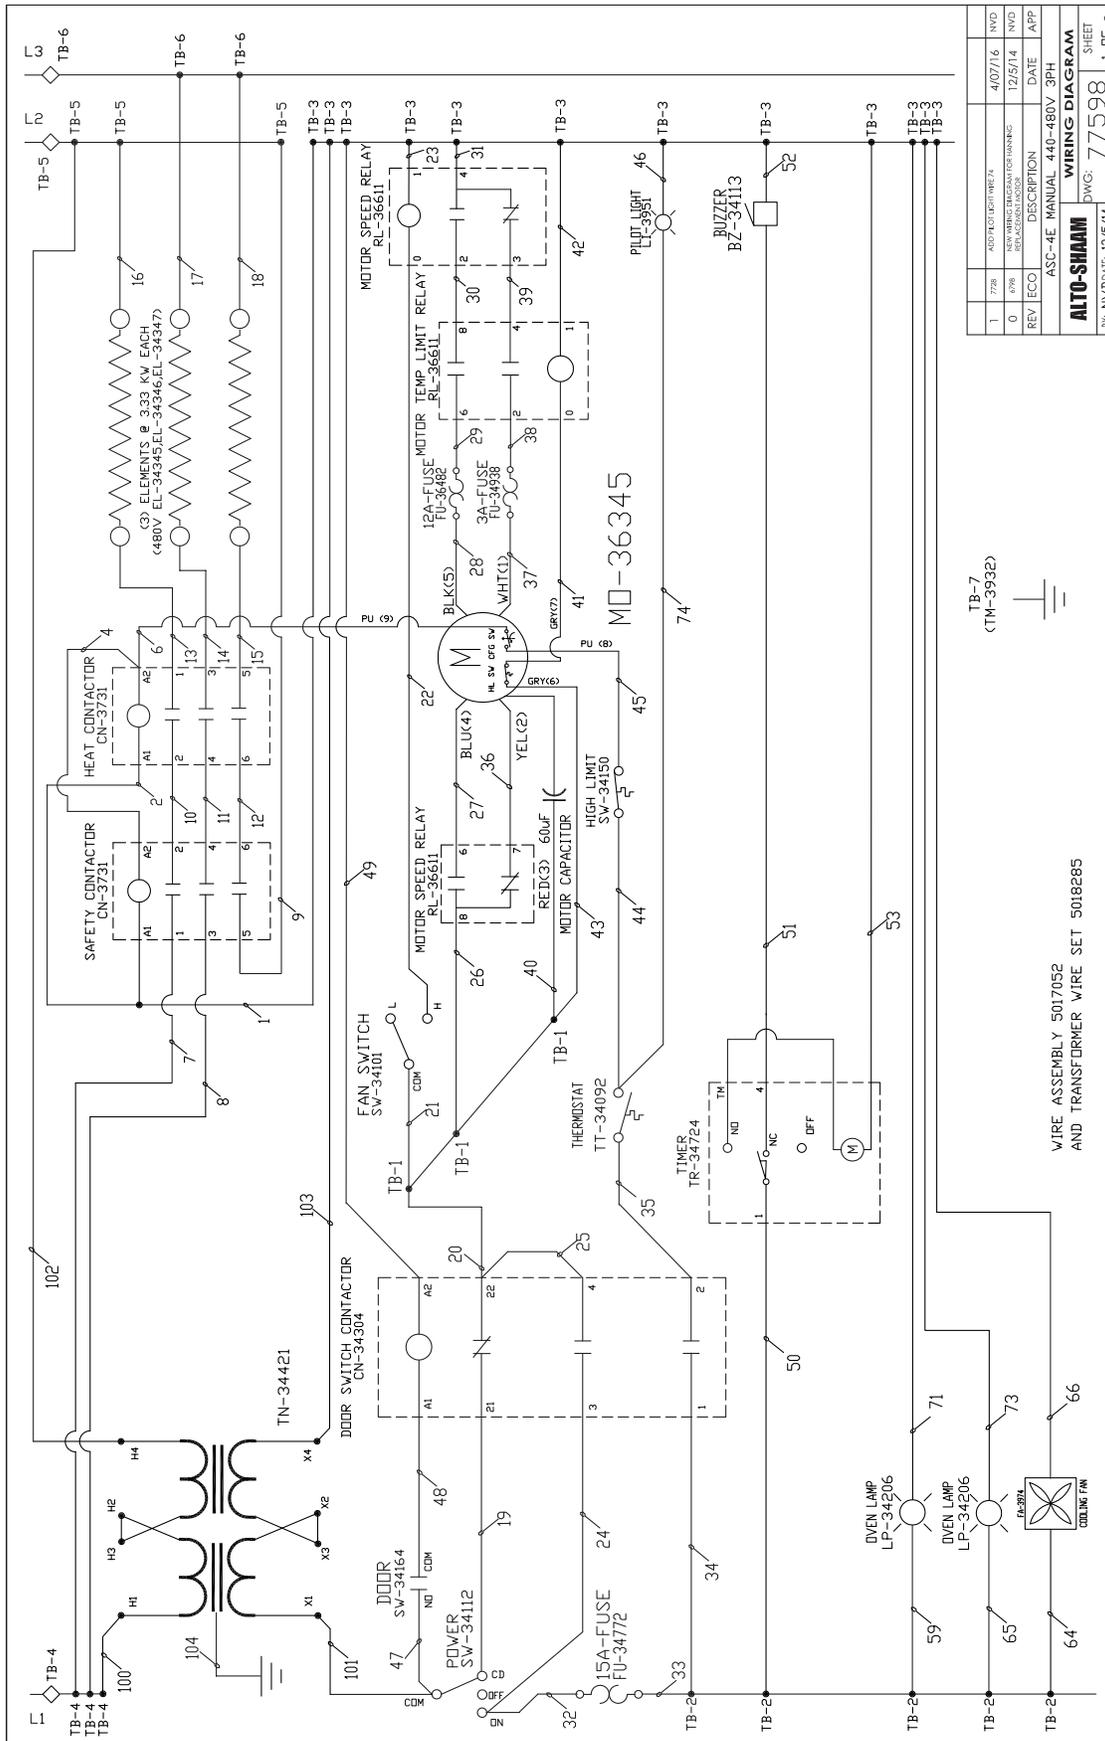


REV	ECO	DESCRIPTION	DATE	APP
1	778	ADD FUSE TO HEATER	4/07/16	NVD
0	678	REVISED FOR DRAWING	12/5/14	NVD
		REVISED FOR DRAWING		

ASC-4E MANUAL 440-480V 3PH	
WIRING DIAGRAM	SHEET
DWG: 77598	1 OF 2

ALTO-SHAAM	
WIRING DIAGRAM	
BY: NVDDRAE 12/5/14	DWG: 77598
SHEET 1 OF 2	

WIRE ASSEMBLY 5017052
AND TRANSFORMER WIRE SET 5018285

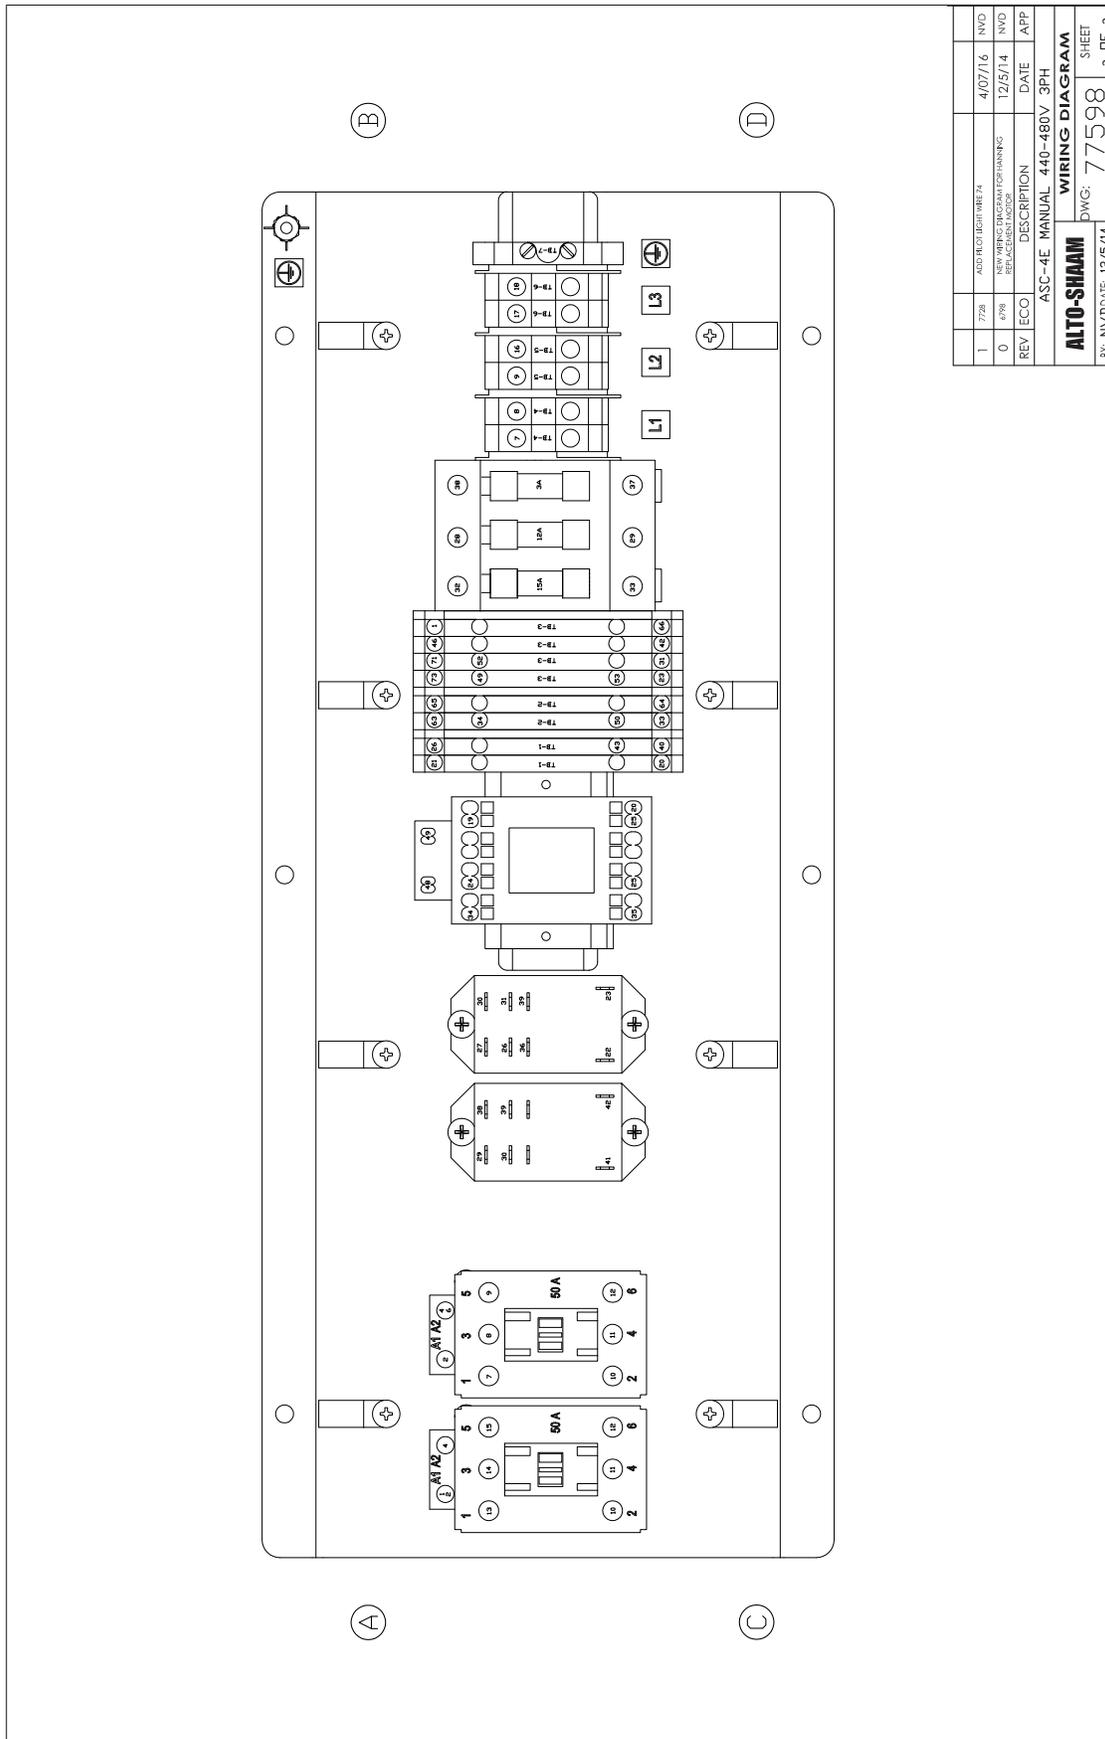

1	7728	ADD RECT LIGHT WBE 74	NVD	4/07/16	NVD
0	6798	NEW WIRING DIAGRAM FOR HANNING REPLACEMENT ORDER	NVD	12/5/14	NVD
REV	ECO	DESCRIPTION	DATE	DATE	APP
		ASC-4E MANUAL 440-480V 3PH			

ALTO-SHAAM		WIRING DIAGRAM	
DWG: 77598		SHEET	
BY: NV/D/DATE: 12/5/14		2 OF 2	

Alto-Shaam, Inc. warrants to the original purchaser only that any original part that is found to be defective in material or workmanship will, at Alto-Shaam's option, subject to provisions hereinafter stated, be replaced with a new or rebuilt part.

The original parts warranty period is as follows:

For the refrigeration compressor on Alto-Shaam Quickchillers™, five (5) years from the date of installation of appliance.

For the heating element on Halo Heat® cooking and holding ovens, as long as the original purchaser owns the oven. This excludes holding only equipment.

For all other original parts, one (1) year from the date of installation of appliance or fifteen (15) months from the shipping date, whichever occurs first.

The labor warranty period is one (1) year from the date of installation or fifteen (15) months from the shipping date, whichever occurs first.

Alto-Shaam will bear normal labor charges performed during standard business hours, excluding overtime, holiday rates or any additional fees.

To be valid, a warranty claim must be asserted during the applicable warranty period. This warranty is not transferable.

This warranty does not apply to:

1. Calibration.
2. Replacement of light bulbs, door gaskets, and/or the replacement of glass due to damage of any kind.
3. Equipment damage caused by accident, shipping, improper installation or alteration.
4. Equipment used under conditions of abuse, misuse, carelessness or abnormal conditions, including but not limited to, equipment subjected to harsh or inappropriate chemicals, including but not limited to, compounds containing chloride or quaternary salts, poor water quality, or equipment with missing or altered serial numbers.
5. Damage incurred as a direct result of poor water quality, inadequate maintenance of steam generators and/or surfaces affected by water quality. Water quality and required maintenance of steam generating equipment is the responsibility of the owner/operator.
6. Damage caused by use of any cleaning agent other than Alto-Shaam's Combitherm® Cleaner, including but not limited to damage due to chlorine or other harmful chemicals. **Use of Alto-Shaam's Combitherm® Cleaner on Combitherm® ovens is highly recommended.**
7. Any losses or damage resulting from malfunction, including loss of product, food product, revenue, or consequential or incidental damages of any kind.
8. Equipment modified in any manner from original model, substitution of parts other than factory authorized parts, removal of any parts including legs, or addition of any parts.

This warranty is exclusive and is in lieu of all other warranties, express or implied, including the implied warranties of merchantability and fitness for a particular purpose. In no event shall Alto-Shaam be liable for loss of use, loss of revenue or profit, or loss of product, or for any indirect, special, incidental, or consequential damages. No person except an officer of Alto-Shaam, Inc. is authorized to modify this warranty or to incur on behalf of Alto-Shaam any other obligation or liability in connection with Alto-Shaam equipment.

Effective November 1, 2012