
Easy Install Pre-Rinse Unit

Architect/Engineering Specifications:

8" wall mount mixing faucet with polished chrome plated brass body, 12" riser, 44" flexible stainless steel hose with heat resistant handle, 1.42 GPM spray valve, ceramic cartridges with check valves, lever handles, 1/2" NPT female inlets, 6" adjustable wall bracket, spray valve holder, and overhead spring. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. EPAct 2005 compliant.

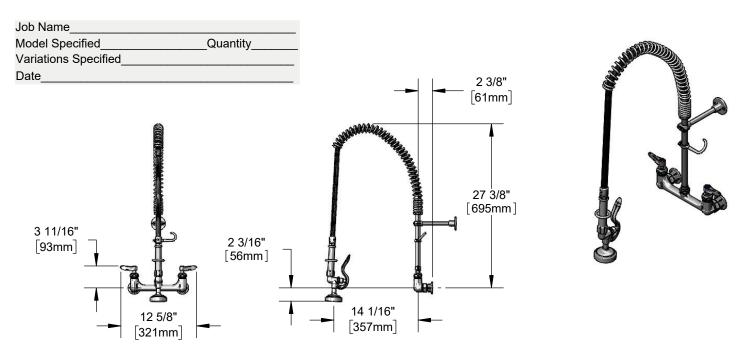

Features & Benefits:

- 8" wall mount mixing faucet w/ polished chrome plated brass body
- EasyInstall 12" riser for quick installation
- 44" flexible stainless steel hose w/ heat resistant gray handle and hold down ring
- 1.42 GPM spray valve
- Quarter-turn Cerama cartridges with check valves to prevent cross flow of water
- Lever handles w/ color coded indexes
- 1/2" NPT female eccentric inlets with Ø 2" flanges
- Adjustable centers from 7 3/4" to 8 1/4"
- 6" adjustable wall bracket
- Material: Polished chrome plated brass body, riser and spray valve body, stainless steel hose & chrome plated metal handles

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- EPAct 2005 (PRSV)

Warranty: Three Year (Limited)

Cerama Cartridge: Lifetime (Limited)

Performance Data:

Pressure: 20 - 125 psi Temperature: 40 °F - 140 °F Flow Rate: 1.42 GPM @ 60 psi



Optional Handles

- ☐ 4" Wrist Action
- □ Lever (Standard)
- □ 4-Arm

Optional Cartridges With Checks

- □ Quarter-Turn Cerama w/ Check Valve (Standard)
- □ Quarter-Turn Eterna w/ Spring Check

Optional Pre-Rinse Spray Valves

- ☐ B-0107 (1.42 GPM) (Standard)
- □ B-0107-C (0.65 GPM)
 □ B-0107-J (1.07 GPM)
- □ B-0108 (1.07 GPM)
- □ B-0108-C (0.65 GPM)







T&S BRASS AND BRONZE WORKS, INC.

